

# Configuration & Persistency Service

- TSC presentation – May 28, 2020 version 6a

 Ben Cheung (Nokia)

 Marge Hillis (Nokia)

 Joanne Liu-Rudel (AT&T)

 Shankar N K (AT&T)

 Ted Johnson (AT&T)

 Zu Qiang (Ericsson)

 Michela Bevilacqua (Ericsson)

 Toine Siebelink (Ericsson)

 Bruno Sokoto (Bell Canada)

 Tony Finnerty (Ericsson)


 Ciaran Johnston (Ericsson)

 Swami N (Wipro)

 Bruno Sokato (Bell Canada)

# DDF June 22-25, 2020 – C&PS Agenda

TIME	JUNE 11, 2020 AGENDA ITEM
20 min	<b>Overview of C&amp;PS</b> – Introduction
20 min	<b>Model Driven C&amp;PS Proof of Concept (PoC)</b> – Overview of the Model-Driven C&PS PoC for R7
10 min	<b>R7 &amp; Beyond Roadmap</b> – Model Driven Proof of Concept (PoC) in R7, way forward in R8 Honolulu, New plan & roadmap
10 min	<b>Questions &amp; Answers</b> – Af

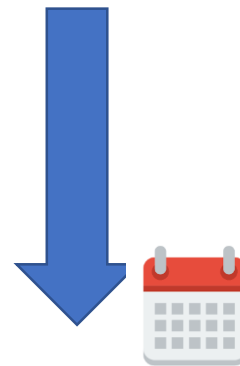

TIME	Q&A Session Post-Session(
(1 hour)	<b>Follow-up questions</b> – Follow-up meetings at C&PS Team Call (Friday)

# Overview of Configuration & Persistency Service



**Business Case**



**Architecture S/C**



**Overview**



**Technical Flows**

# R7 Configuration Persistency Service

**Executive Summary** - The Configuration & Persistency Service is a *real-time* new platform component that is designed to serve as a data repository for Run-time data that needs to be persistent. As a stand-alone ONAP component, this project provides data layer services to other ONAP platform components and use cases that require persistent configuration or operational data. The R6 development will be enhanced as well. *Focus on storing run-time DATA RELATED to NETWORK ELEMENT instances.*

**Business Impact** - The ability for service operators to visualize and manage data in a RAN network (PNFs, VNFs, and logical constructs) with ONAP is a critical business function because they are key Life Cycle Management (LCM) and OA&M operations. The project has business impacts to enhance the operation of data-handling within ONAP by providing efficient data layer services.



**Business Markets** - This project applies to any domain (wireless, transport, optical, and wireline) that ONAP may manage. It is not a market or geographical specific capability. It is expected that scaled ONAP installations such as Edge & Core ONAP deployments will also deploy the database across each installation.

**Funding/Financial Impacts** - This project represents a large potential Operating Expense (OPEX) savings for operators because of the ability to configure networks saving time and expenses.


**Organization Mgmt, Sales Strategies** - There is no additional organizational management or sales strategies for this use case outside of a service providers "normal" ONAP deployment and its attendant organizational resources from a service provider.

OSS / BSS / Other


Legend **Design** Orchestration & Management Operations

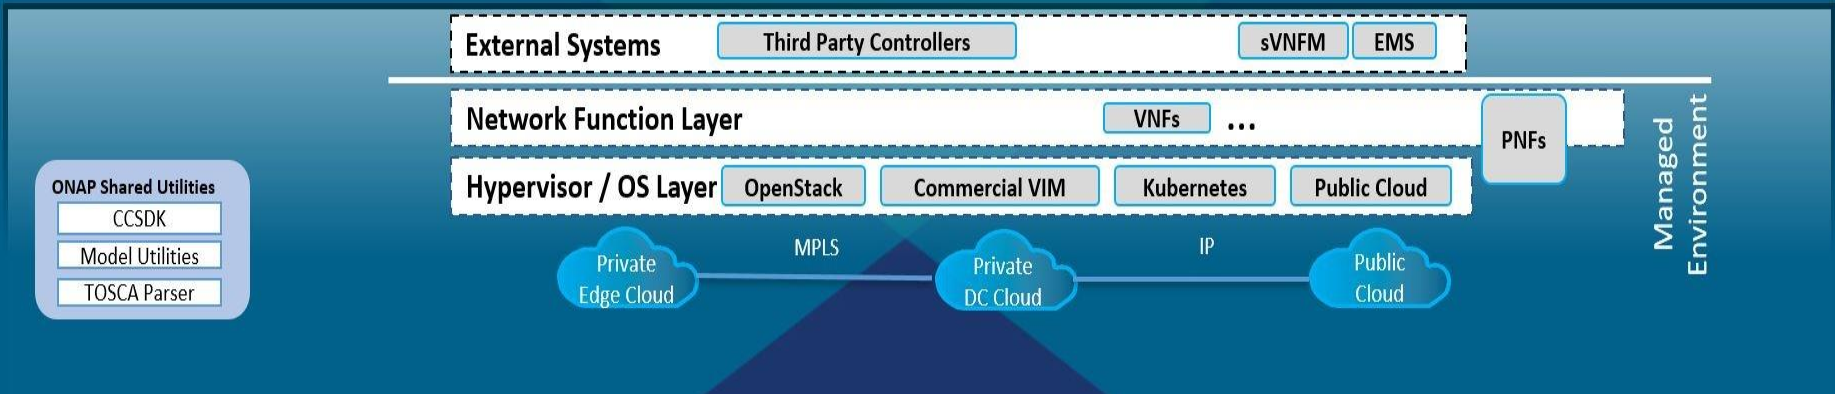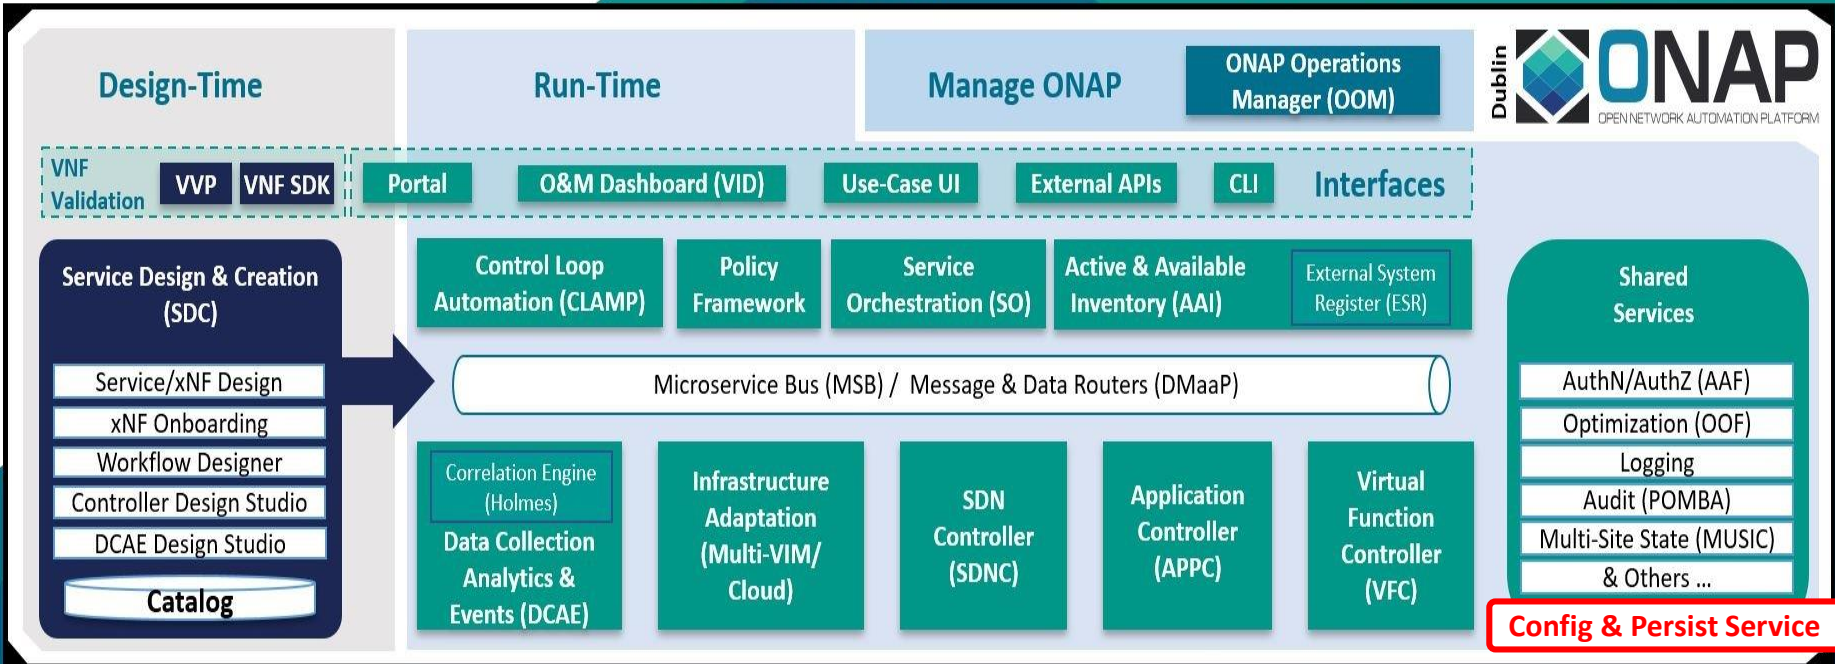

# Configuration & Persistency Service (C&PS)

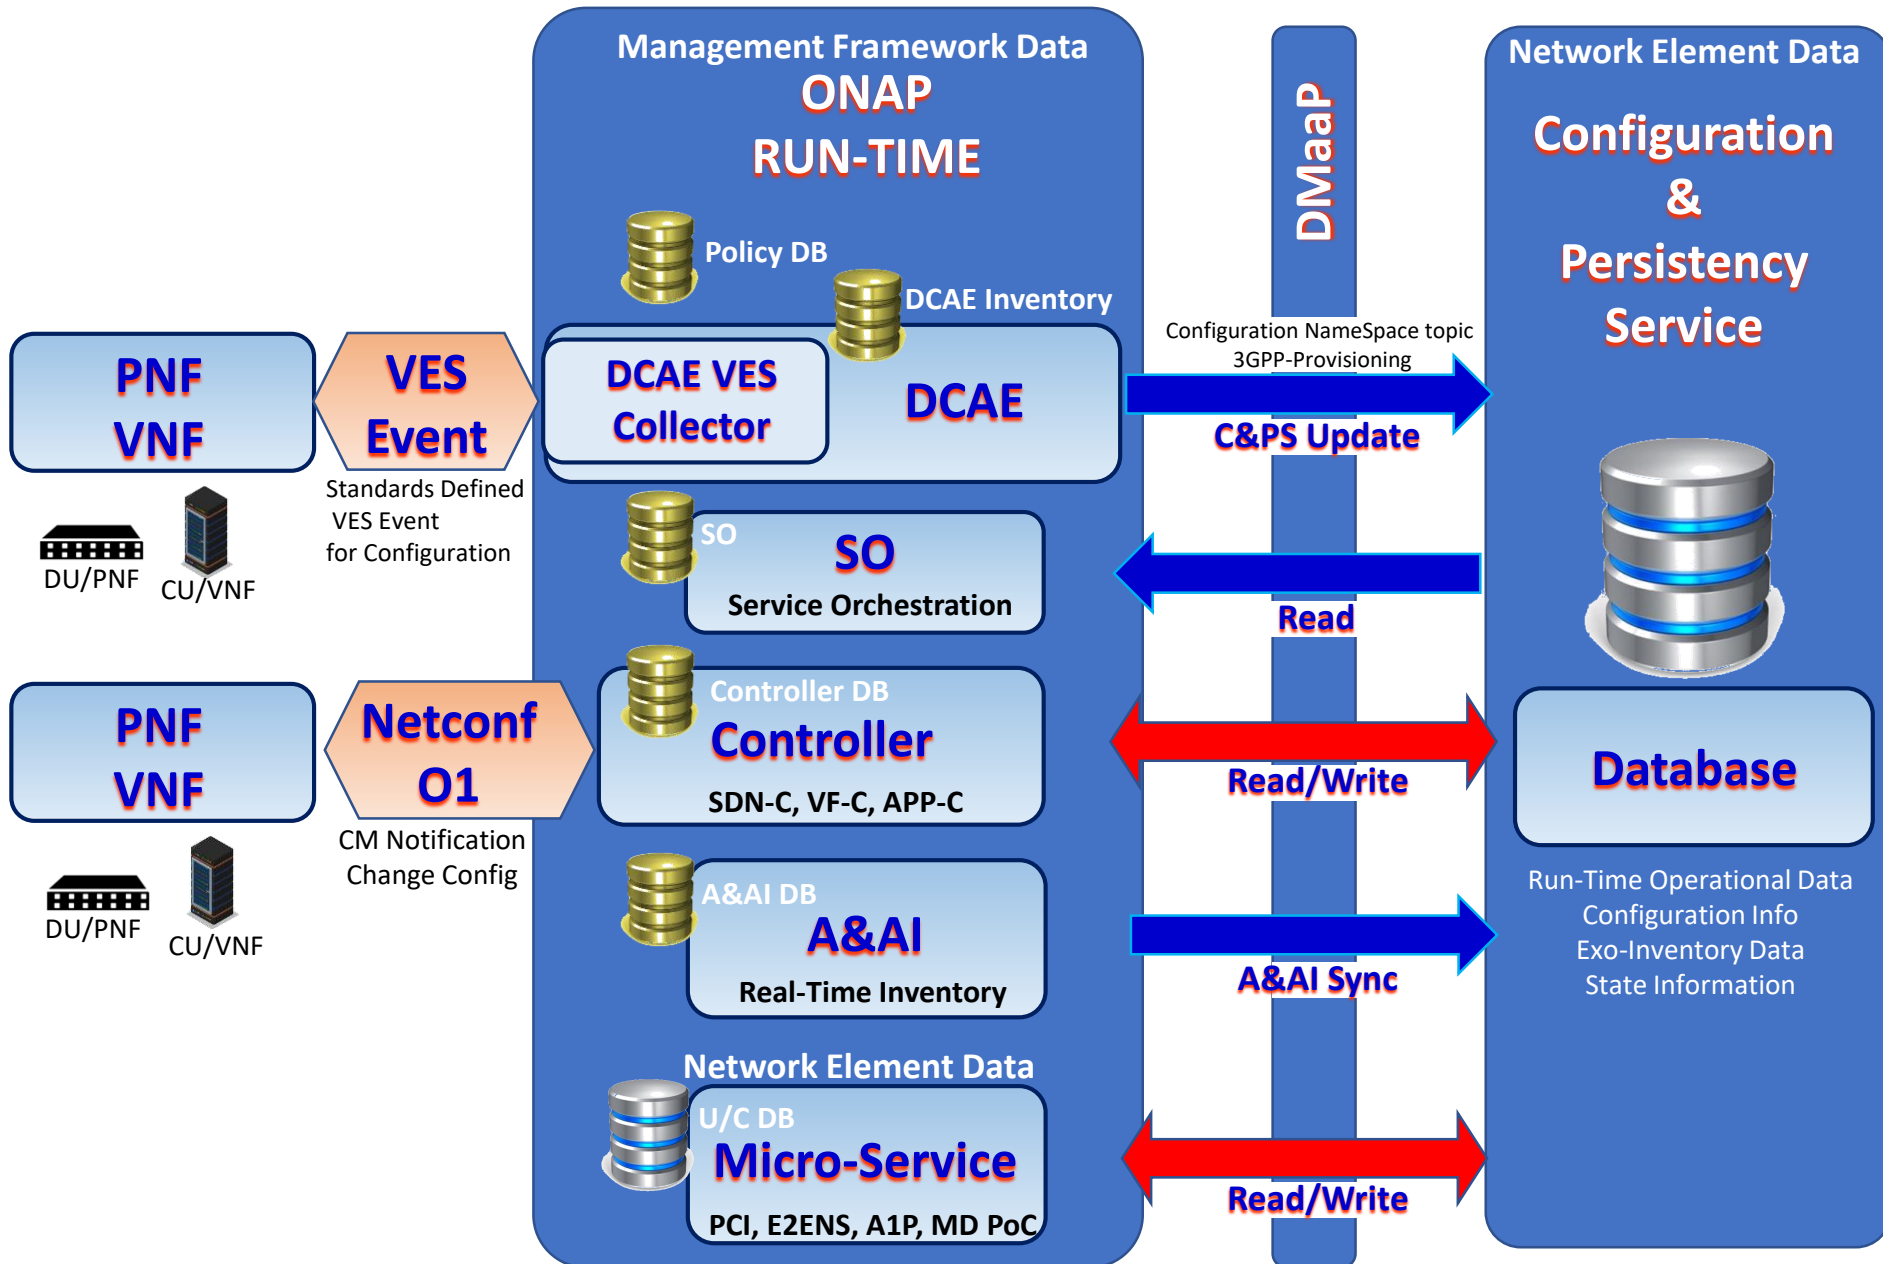

# Configuration & Persistency Service (C&PS)

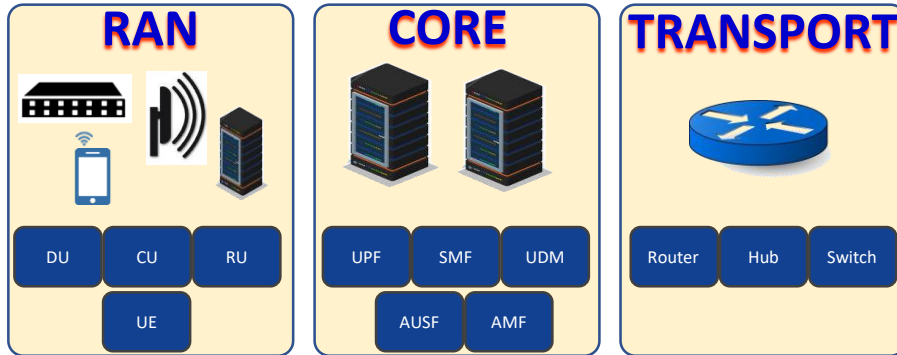

Network Element Data  
Application Parameters  
Configuration Parameters

**C&PS Update**



GUI Access

Network Element Data






**Configuration & Persistency Service**



**Database**

Run-Time Operational Data  
Configuration Info  
Exo-Inventory Data  
State Information


## ONAP Micro-services, POCs & Use Cases

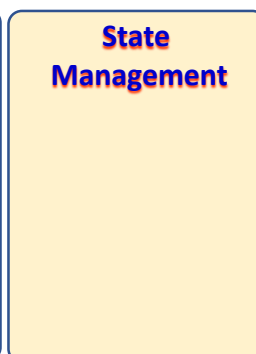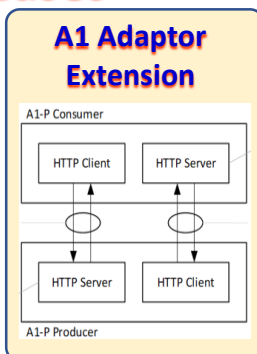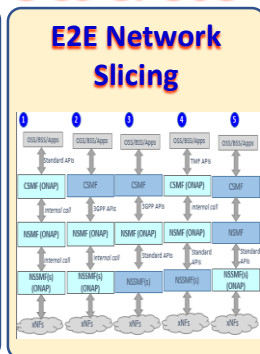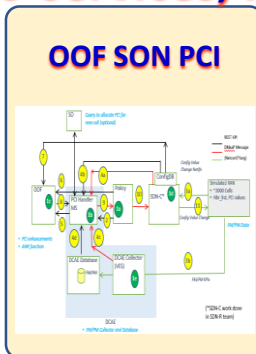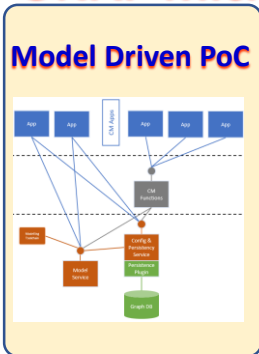

U/C Data




# C&PS READING: PNF Reports Configuration

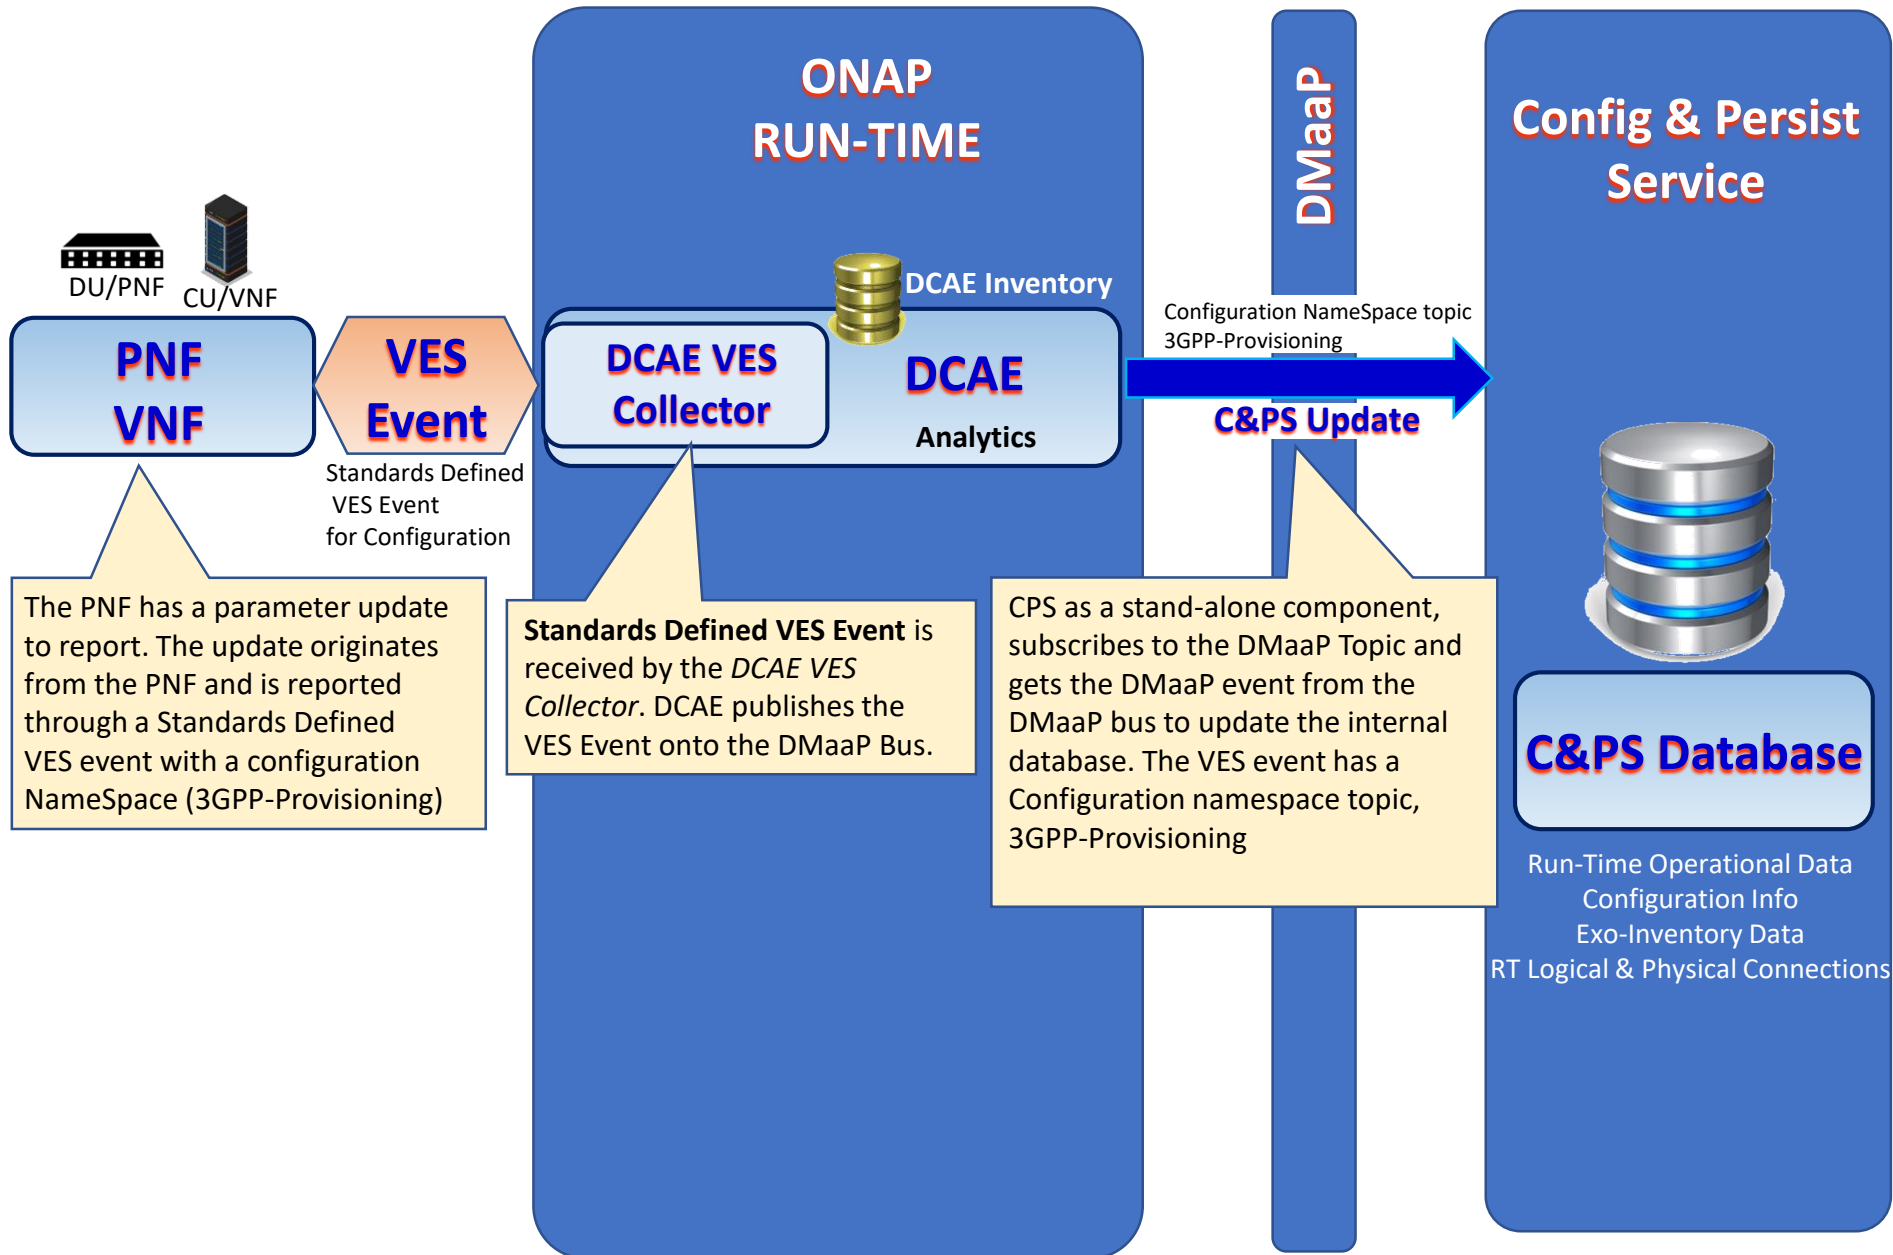





# C&PS READING: PNF Reports StdDef VES

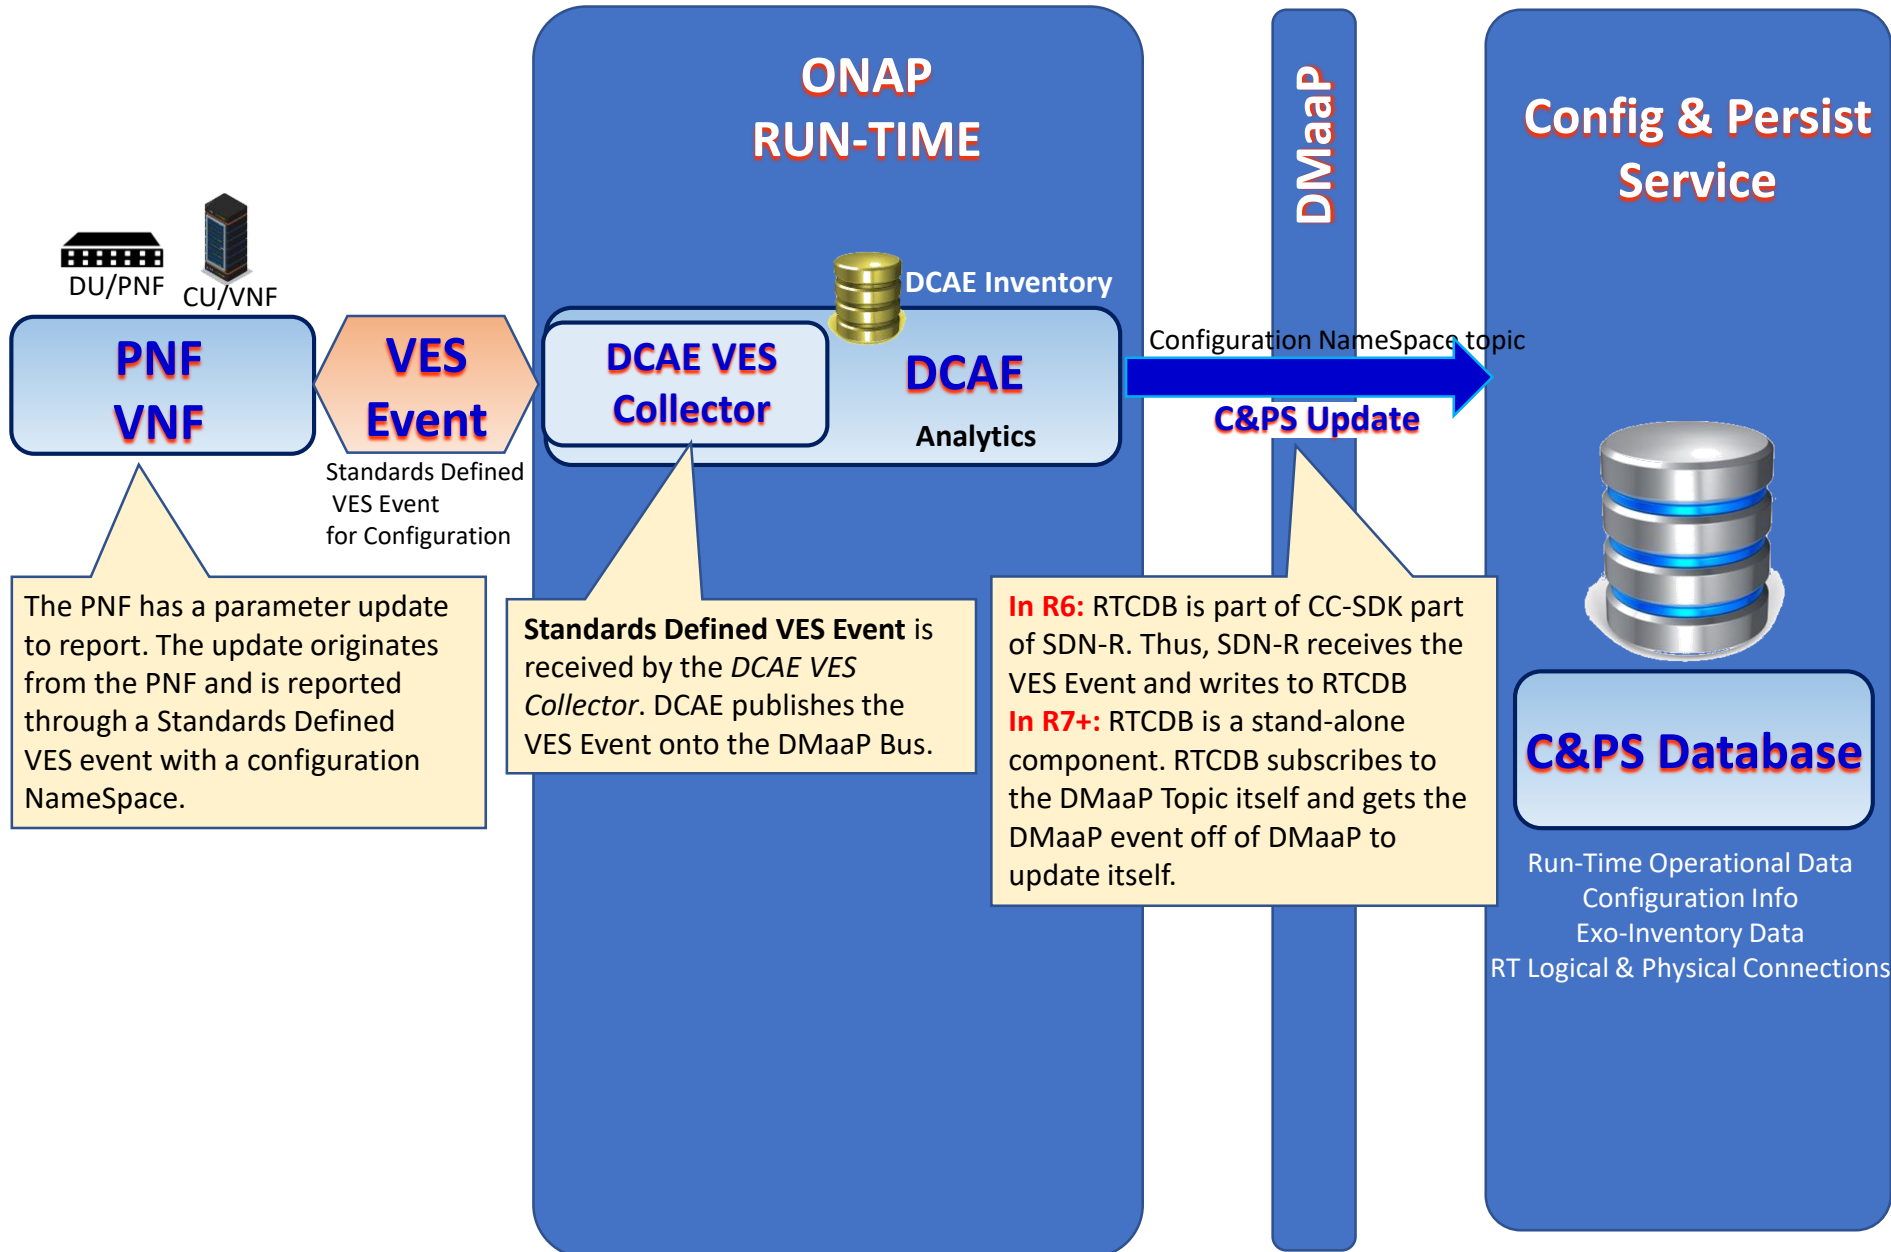


# Data Persistence Service (Run-Time View)

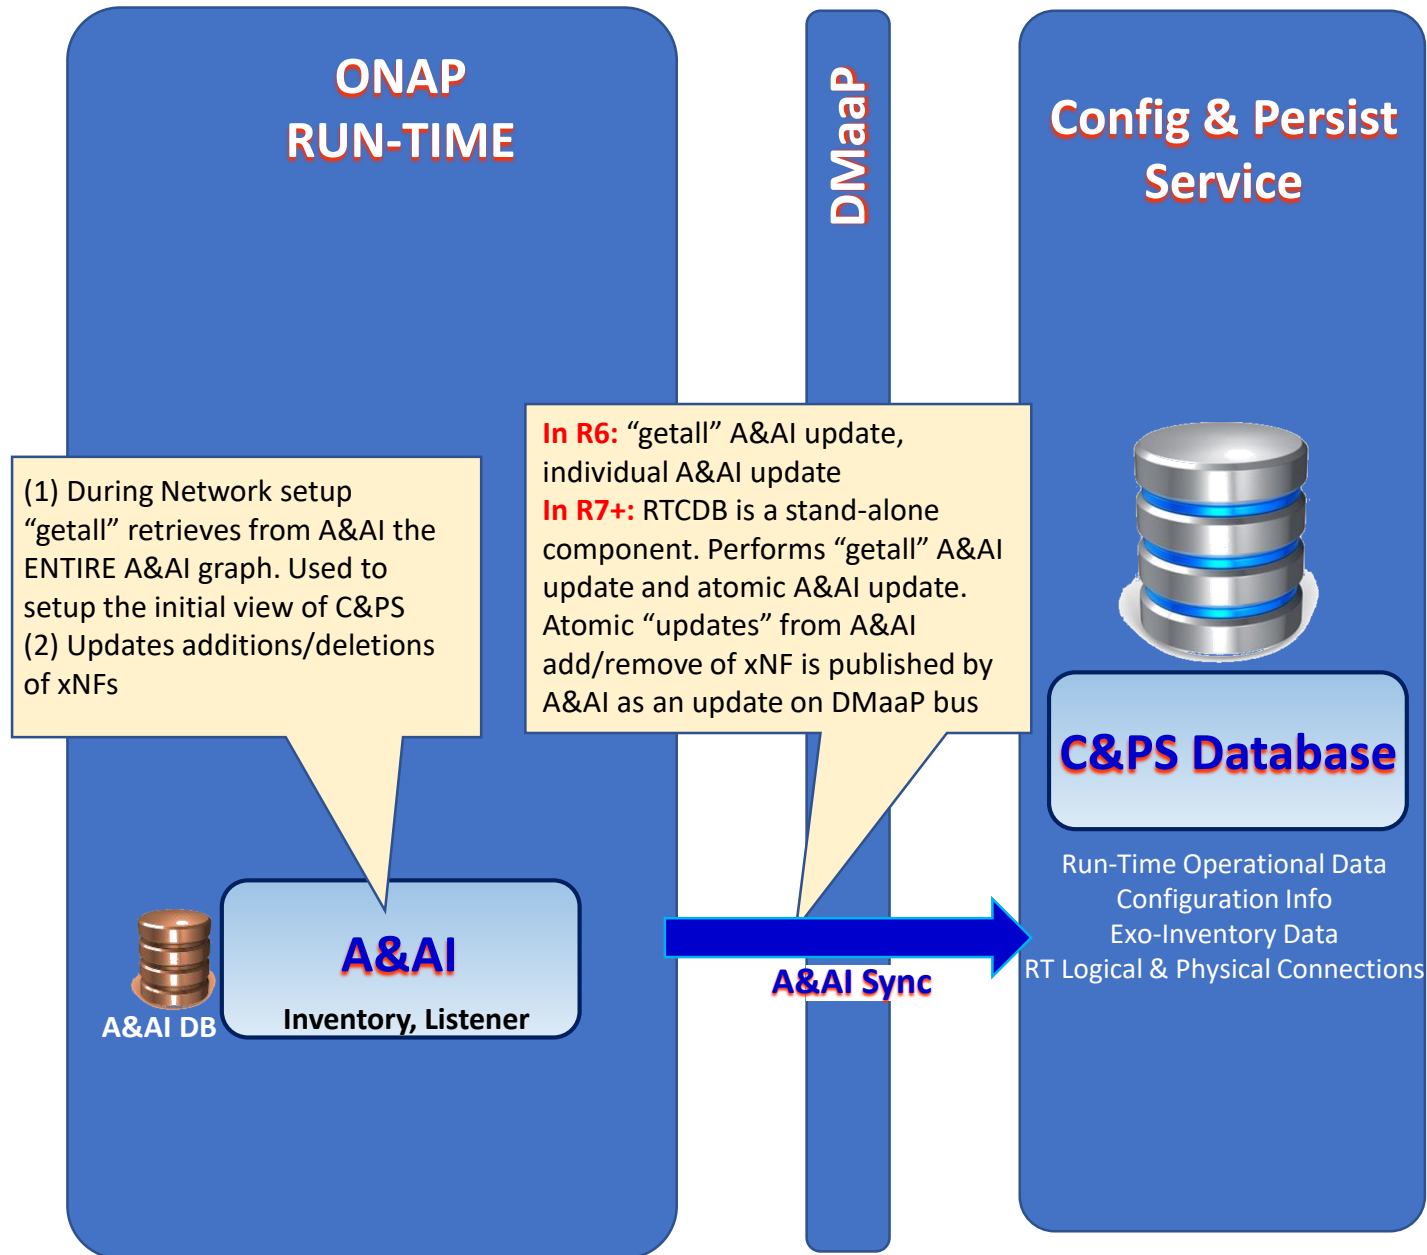


# C&PS WRITING: Micro Service Update

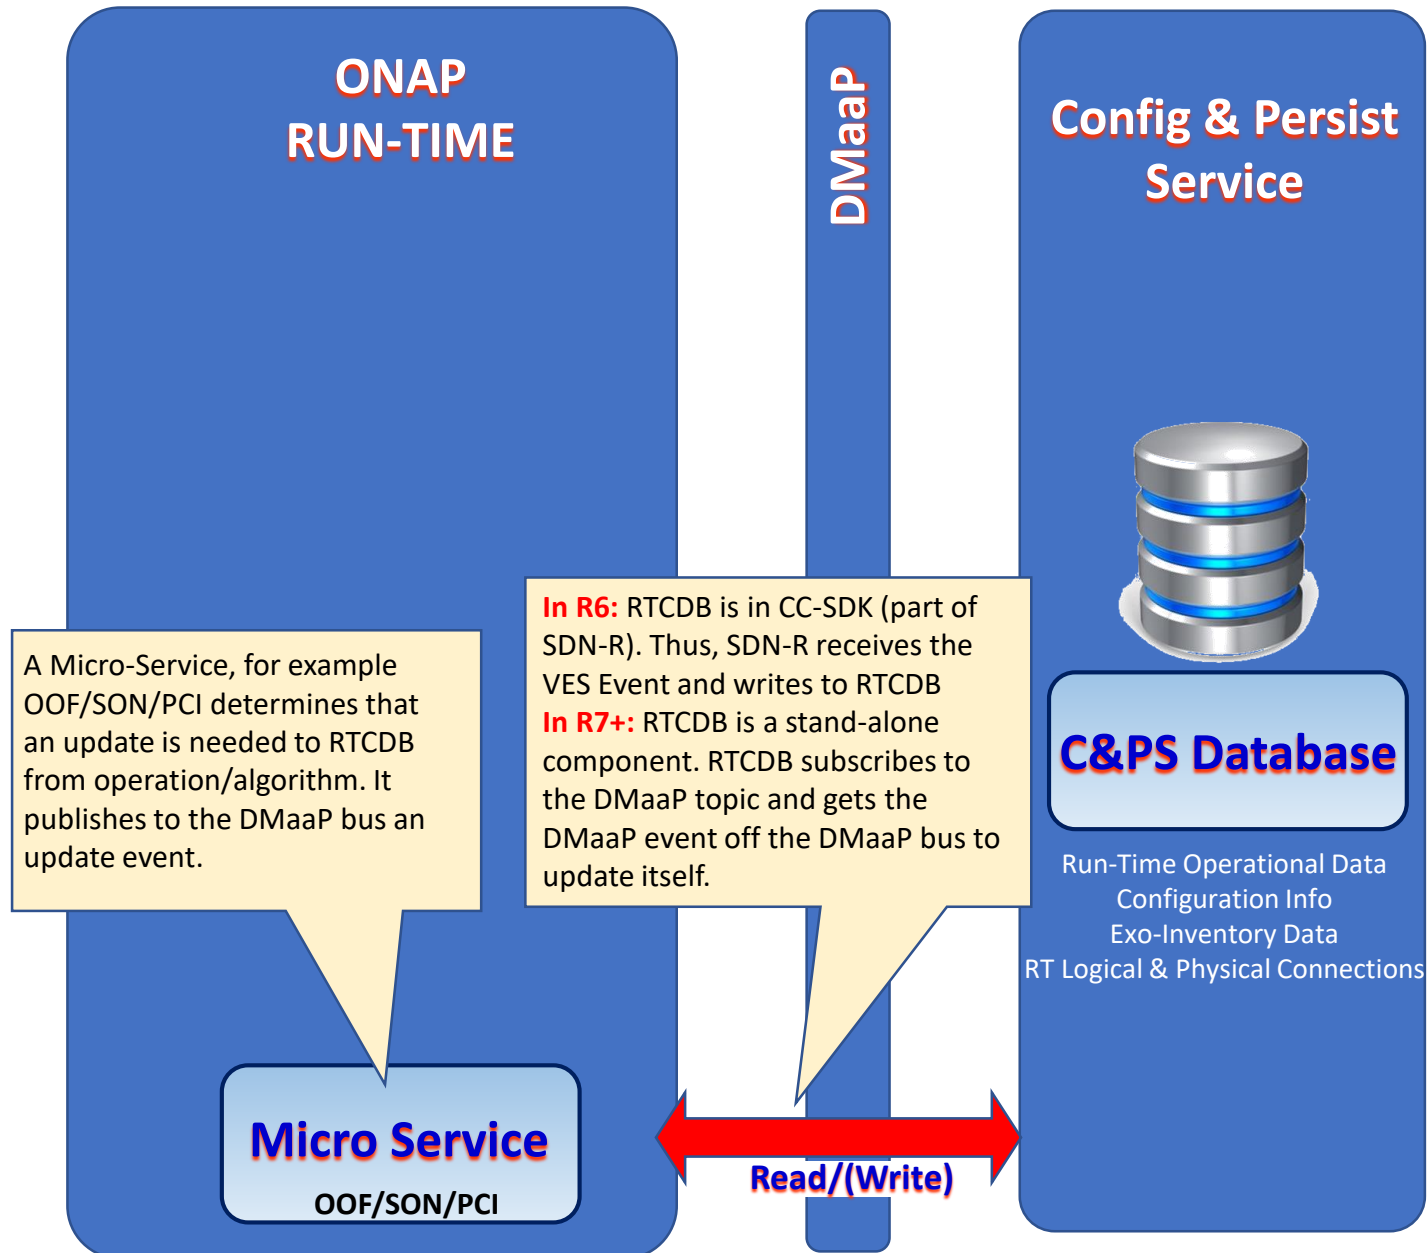

# C&PS WRITING: From Controller SDN-C

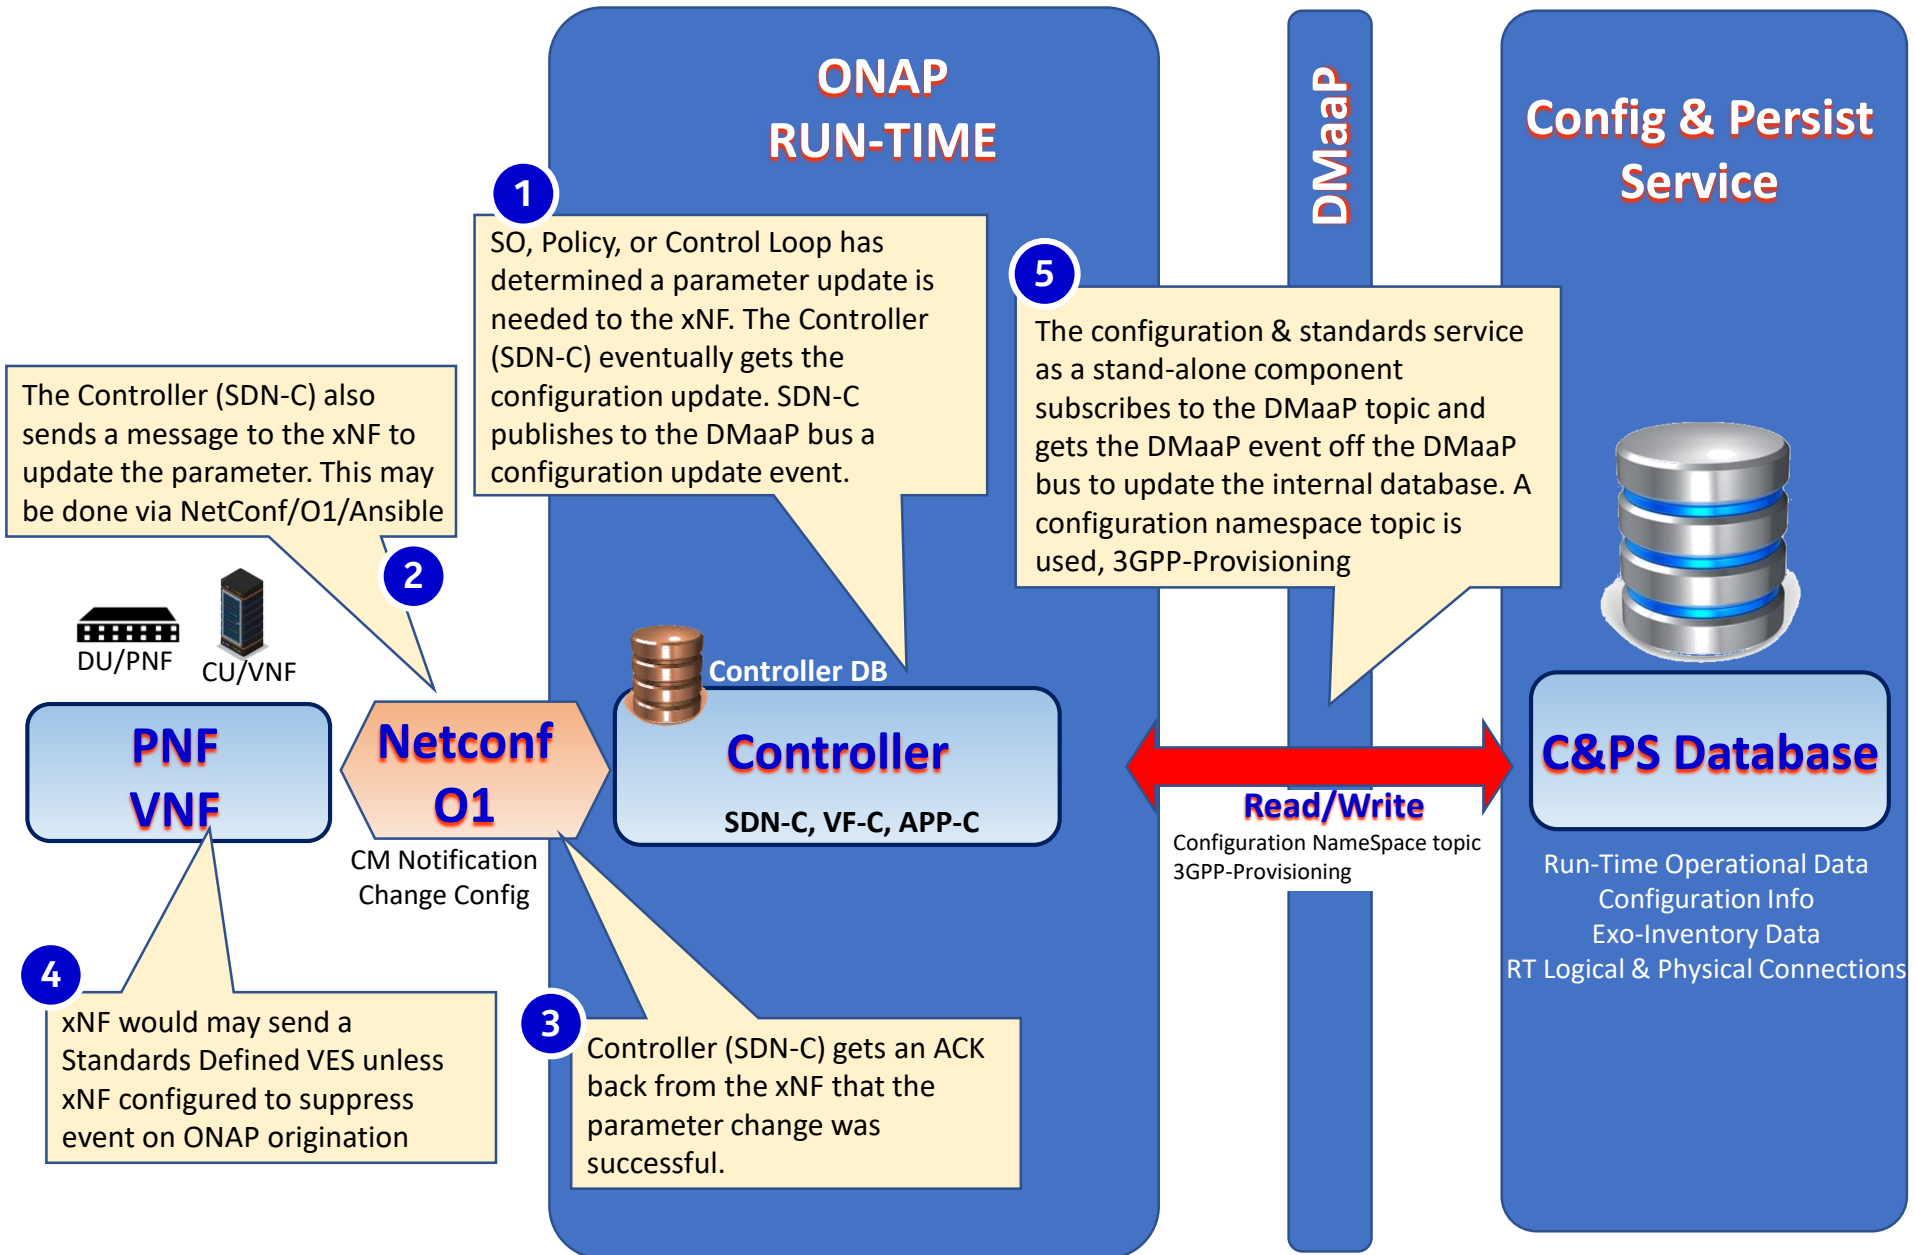

# C&PS WRITING: From Controller SDN-R

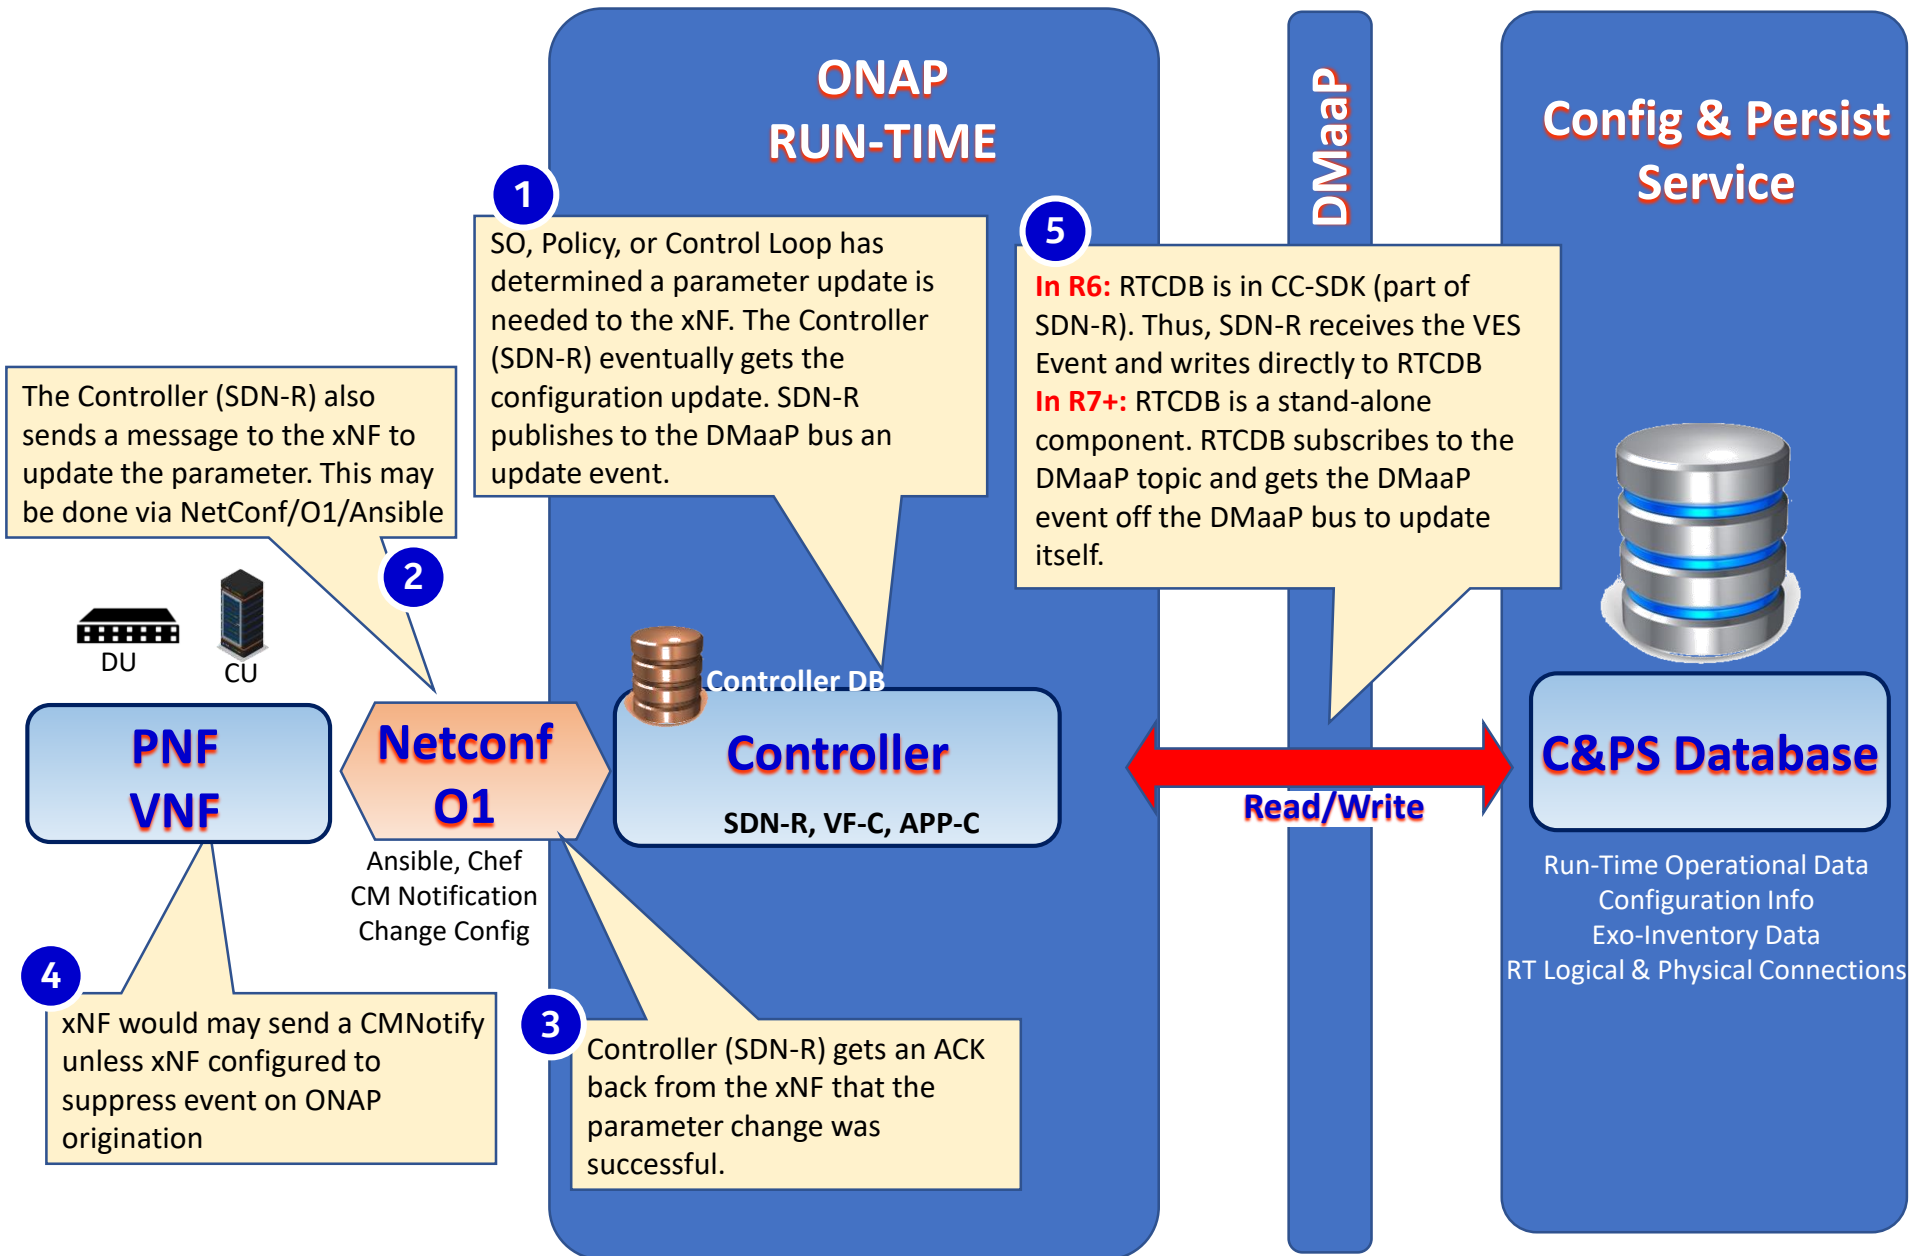


# R7 – Model Driven Configuration & Persistency Service Proof of Concept



**Proof of Concept**


# R7 Model Driven C&PS PoC (Ericsson)

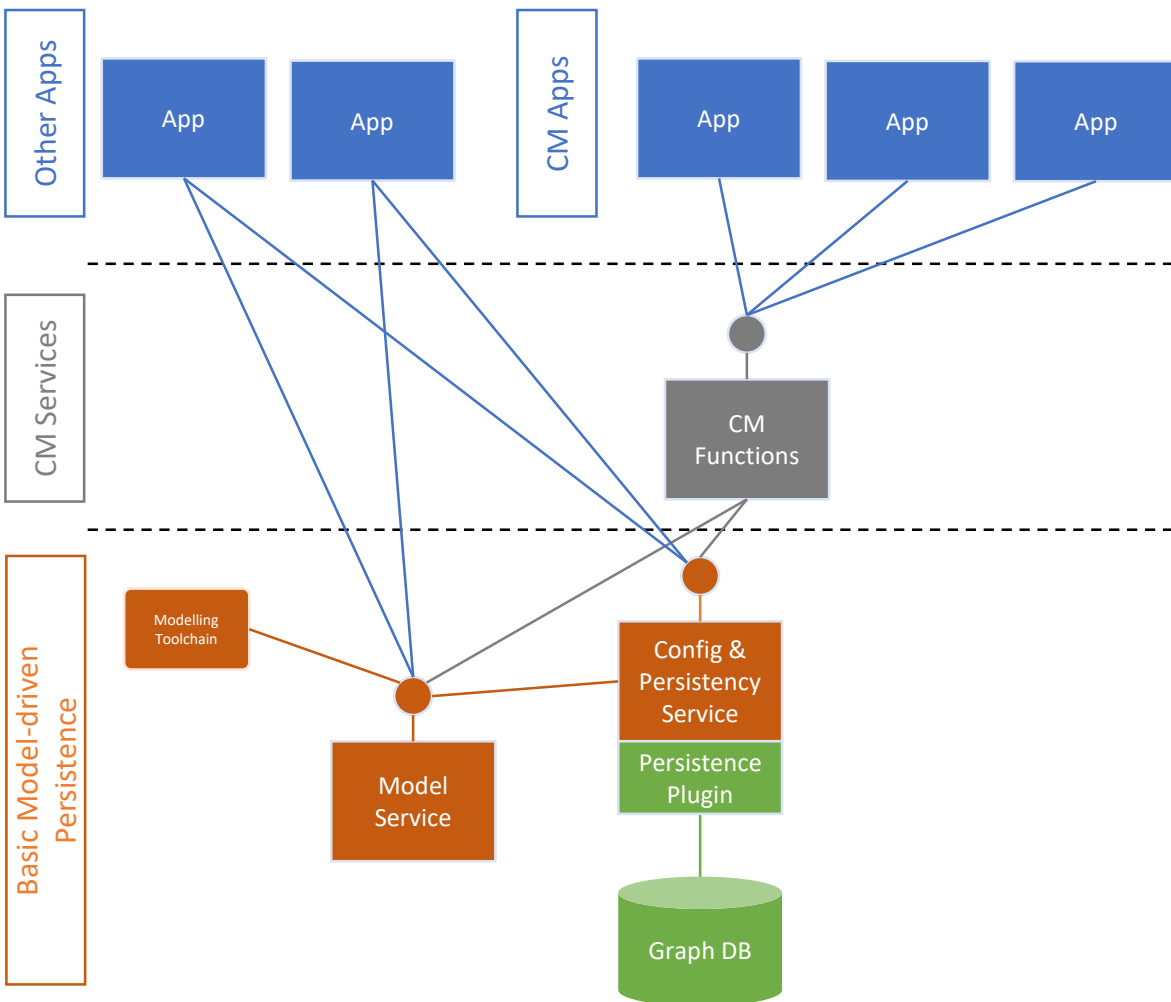

- Provide schema-less model-driven (type safe) access to data which is owned by applications or indirectly by network functions
  - Applications own their own subset of the data according to cloud native principles ; in a separate logical or actual CPS instance
- Provide a model-driven specification for integrating external data sources
- Persisted data can be normalized or non-normalized
- Supports bulk, incremental and attribute value change reconciliation. It is best suited to data that is hierarchical and/or highly connected.
- New model versions can be introduced on-the-fly to the model repository to allow for evolution of the management platform to support network function versions without the need for a software change
- The Model Service is populated in multiple ways
  - Network function models are automatically injected by the Design and Onboarding component when the software packages are onboarded to it
  - Models are discovered from the network functions on instantiation
  - Application-specific models are injected by the App Manager when the app is deployed

# R7 Model Driven C&PS PoC (Ericsson)

Use case    Component    Work required

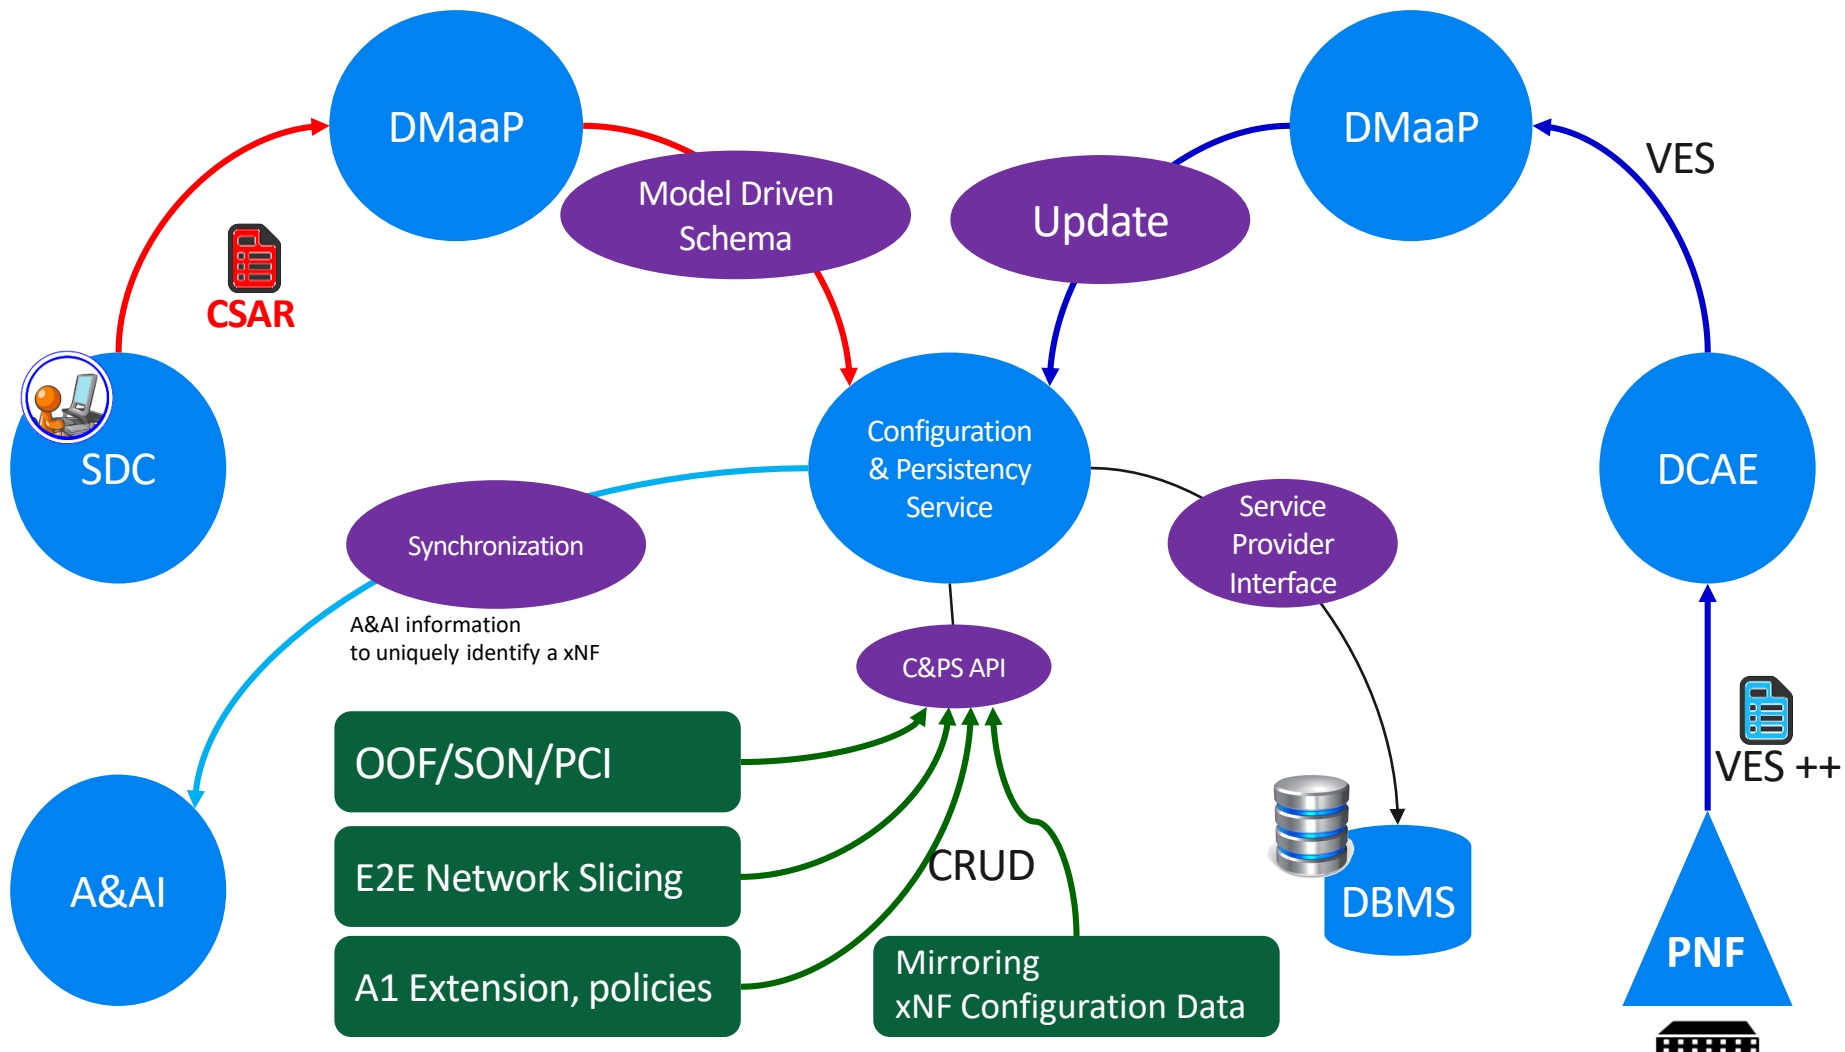



# C&PS Roadmap



**Roadmap**

# C&PS Roadmap & R7-R8 Plan

## Configuration & Persistency Service (CPS) Roadmap –

R7 Guilin

R8 Honolulu

Rx Future

### R6 C&PS Extensions

#### Model-Driven PoC

- Establish key components for C&PS
- Write Real-Time NE *Configuration Data*
- Read (same) Data
- Access Control

#### Supporting R7 Use Cases:

- SON/OOF/PCI U/C,
- 5G E2E Network Slicing
- A1 Policy extension
- State Management
- Model Driven C&PS PoC

December 2020

### R8 C&PS project proposal

#### **CPS FUNCTIONALITY:**

- Data Recovery
- Model Adaption (Dynamic Schema)

July 2021

Rx (future) development

#### **CPS FUNCTIONALITY:**

- Data Auditing
- Topology Traversal
- Data History
- Roll-Back
- Database Backup
- Data Syncing
- Performance Optimization (Scaling)

# Use Cases & Proof of Concepts



**Use Cases**




**Proof of Concept**

# C&PS Use Cases and Proof of Concepts



5G USE CASE	DESCRIPTION
<b>MODEL DRIVEN C&amp;PS POC</b>	Proof of Concept development to showcase model-driven Configuration & Persistency Service operation. It schema-less model-driven (type safe) access to data which is owned by applications or indirectly by network functions
<b>OOF - SON (5G)</b>	Optimization and SON functions for 5G RAN. Self-optimization, Self-Healing, Self-configuration.
<b>NETWORK SLICING (5G Use Case)</b>	Network Slicing defines Slices for 5G RAN systems. Network Slicing is a long-lead (multi-release) development. (will be presented in its own lecture at the Virtual Face to Face)
<b>MOBILITY STANDARDS HARMONIZATION/ A1 adapter</b>	A1 adapter: Enhancing the A1 adapter/interface capabilities in ONAP to manage A1 Policies, support multiple A1 targets in the RAN and multi-version A1 interface for different A1 targets, introduce secure TLS communication.
<b>STATE MANAGEMENT POC</b>	Bell Canada led PoC for State tracking and State management using C&PS

# Model Driven C&PS PoC (Ericsson)

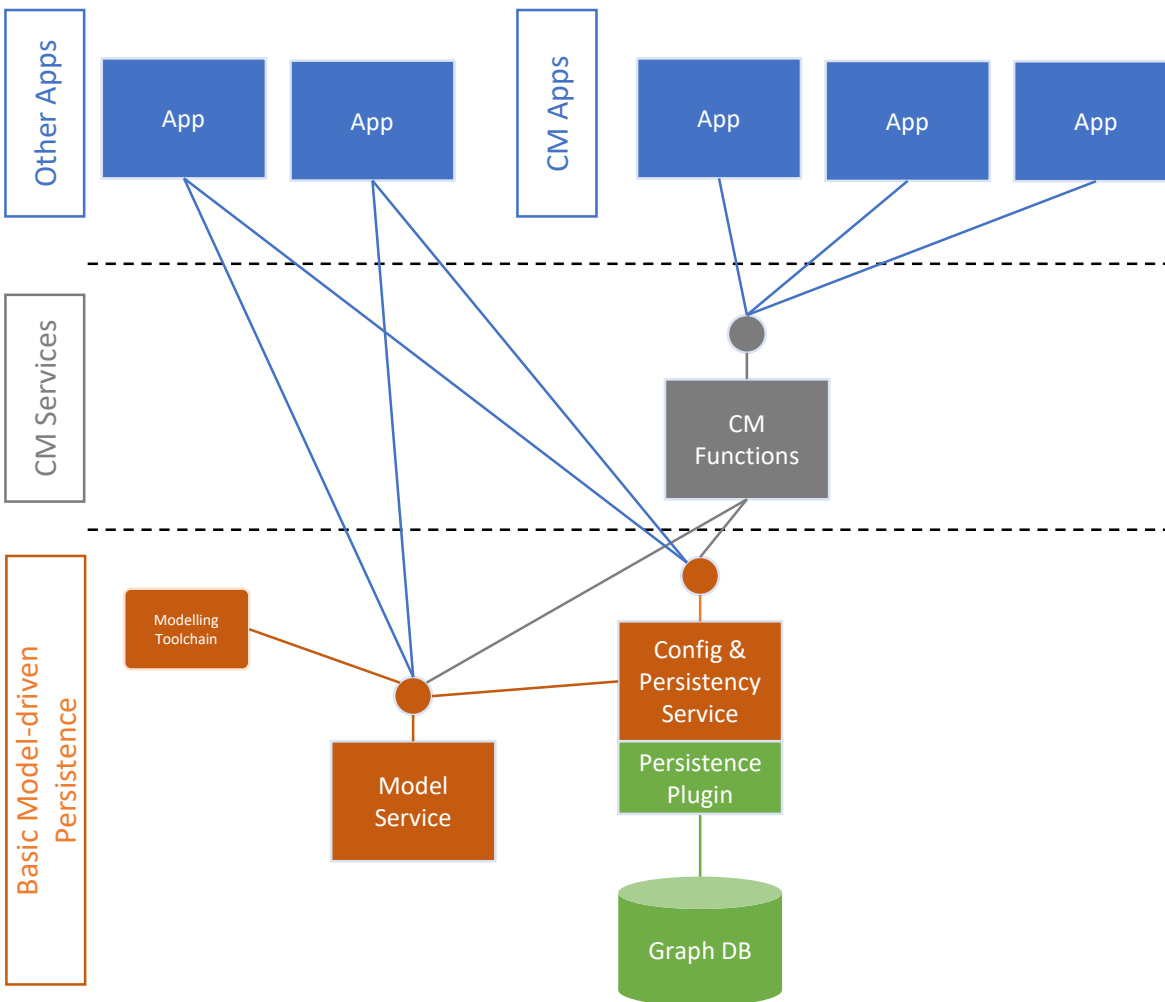


- Provide schema-less model-driven (type safe) access to data which is owned by applications or indirectly by network functions
  - Applications own their own subset of the data according to cloud native principles ; in a separate logical or actual CPS instance
- Provide a model-driven specification for integrating external data sources
- Persisted data can be normalized or non-normalized
- Supports bulk, incremental and attribute value change reconciliation. It is best suited to data that is hierarchical and/or highly connected.
- New model versions can be introduced on-the-fly to the model repository to allow for evolution of the management platform to support network function versions without the need for a software change
- The Model Service is populated in multiple ways
  - Network function models are automatically injected by the Design and Onboarding component when the software packages are onboarded to it
  - Models are discovered from the network functions on instantiation
  - Application-specific models are injected by the App Manager when the app is deployed

# Model Driven C&PS PoC (Ericsson)

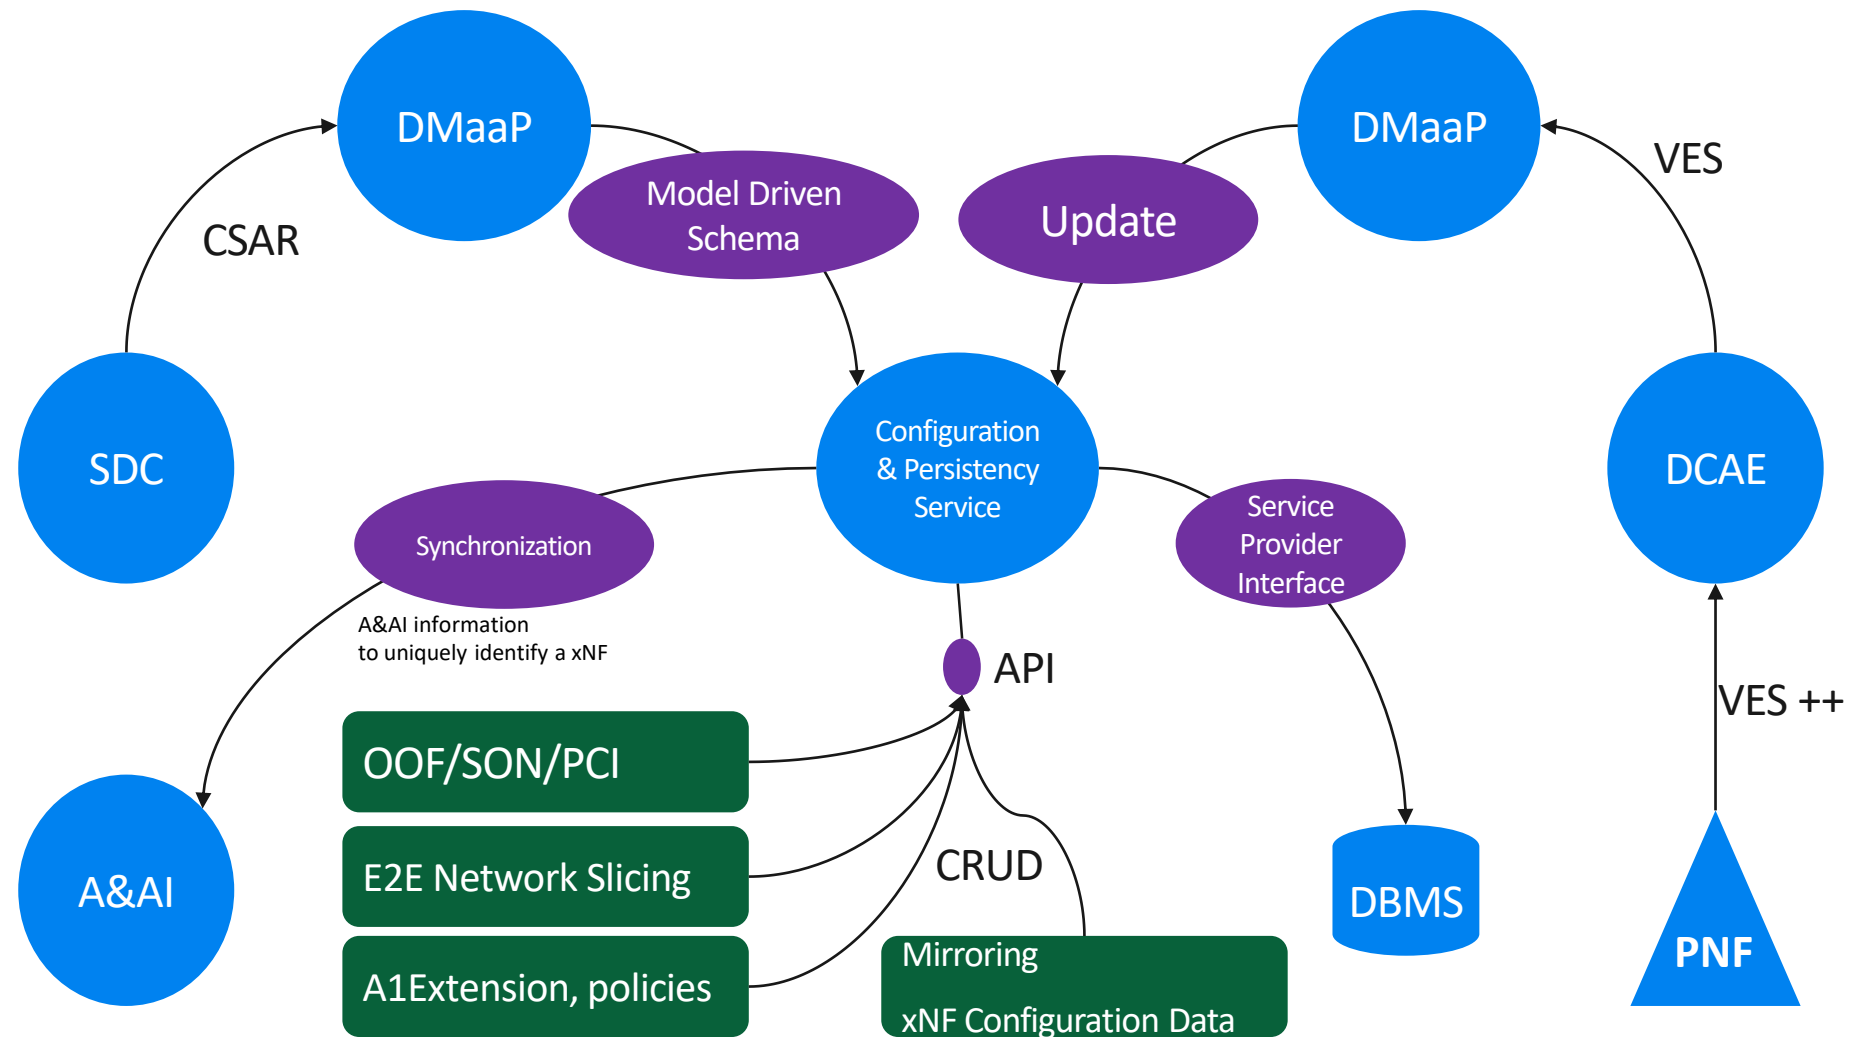

# OOF / SON / PCI Use Case

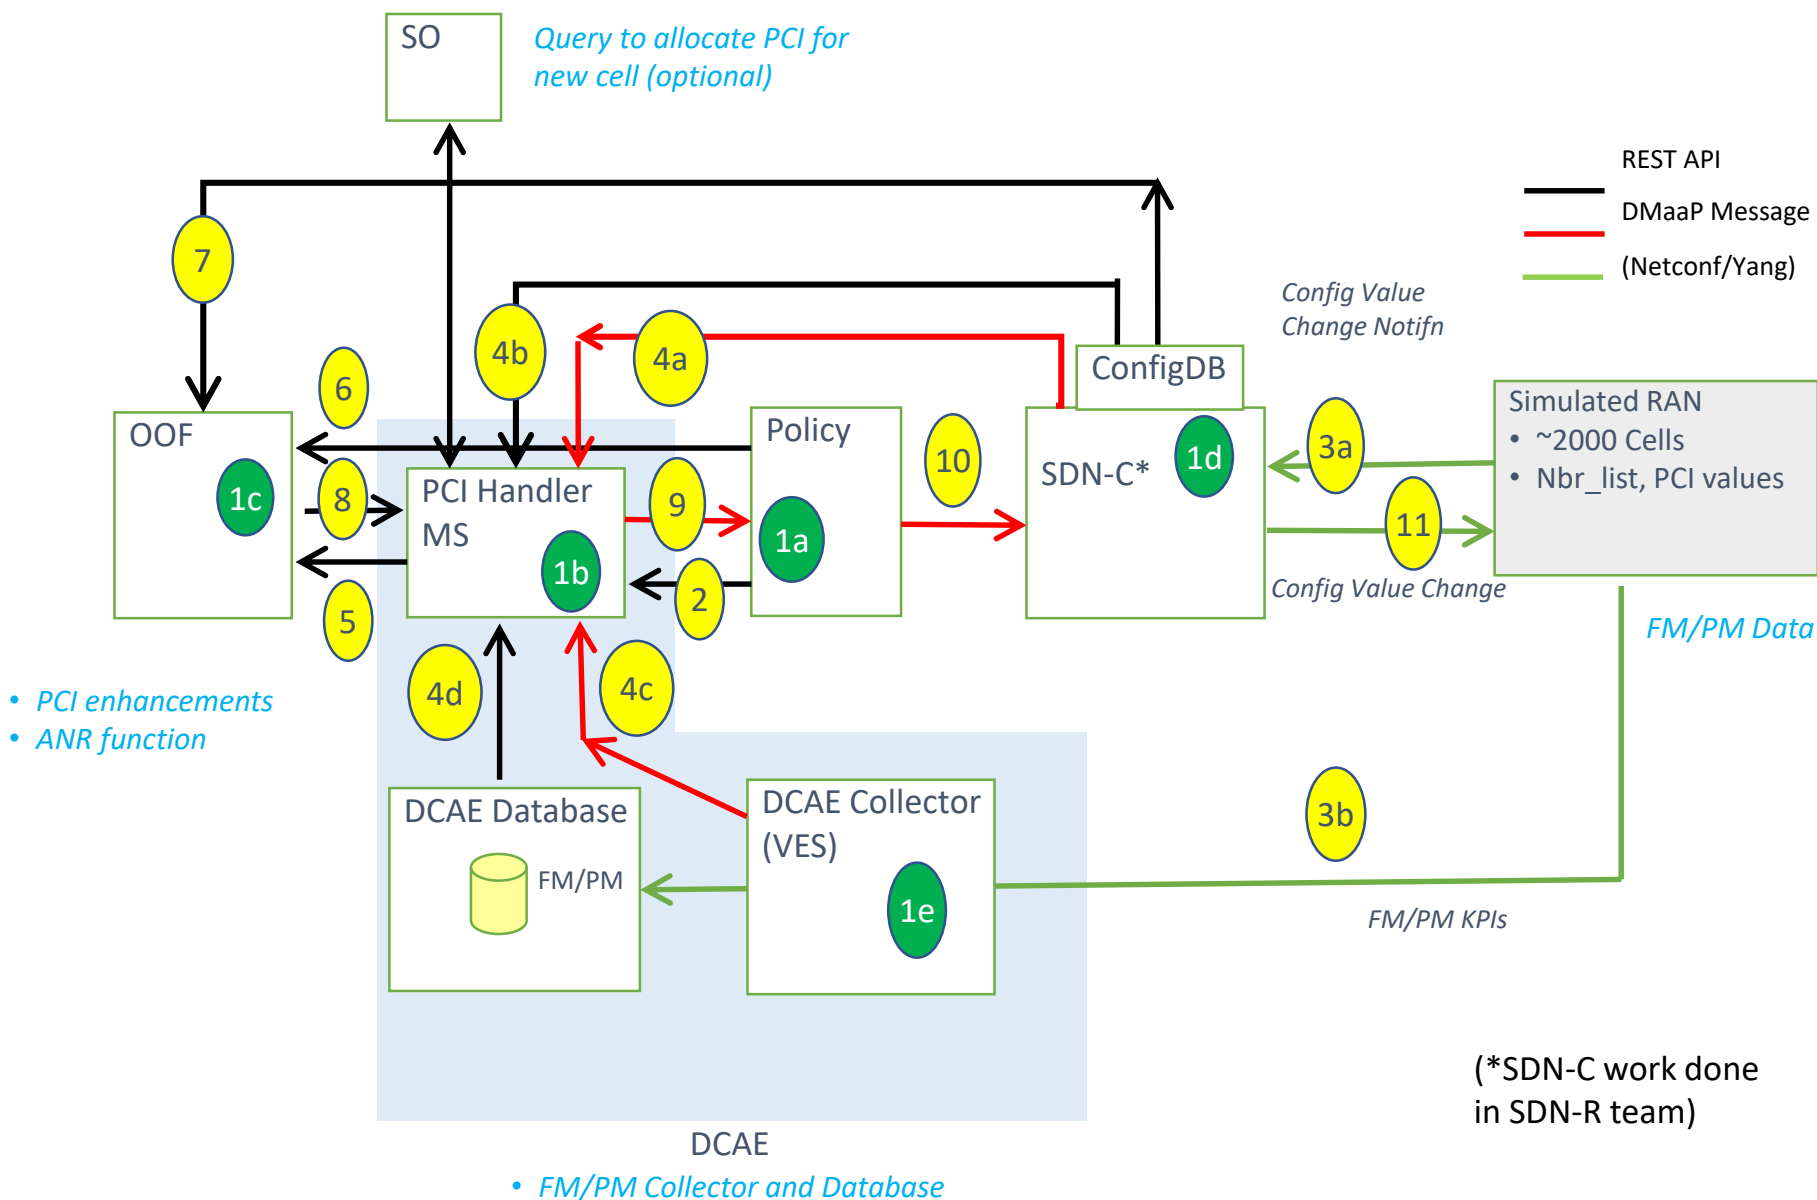

# OOF / SON / PCI Use Case

- Config DB (MariaDB) used by PCI-H-MS (step 4b) and OOF (step 7)
- Query API (swagger JSON spec) exposed to other ONAP modules
- cellId needs to be globally unique (assumed eCGI) and align with ONAP YANG model, ORAN, 3GPP
- pnf-name indicates netconf server to be used for interactions regarding cells
- Pnf object (pnf-name, pnf-id) to be aligned with A&AI (A&AI/ConfigDB interaction to be finalized in Dublin release)

## Cell (Object)

Attribute	Format
networkId	string
cellId	string
pciValue	uint64
nbrList	list of cellId
lastModifiedTS	timestamp
pnf-name	string

## pnf (Object)


Attribute	Format
pnf-name	String
cells	List of cellID's
lastModifiedTS	timestamp

## ConfigDB API

API	Input	Output
GET cellList	networkId, ts	List of cellIds
GET PCI	cellId, ts	PCI Value
GET nbrList	cellId, ts	List of cellIds and their PCI values
GET pnf-name	cellID, ts	pnf-name



# End to End Network Slicing Use Case

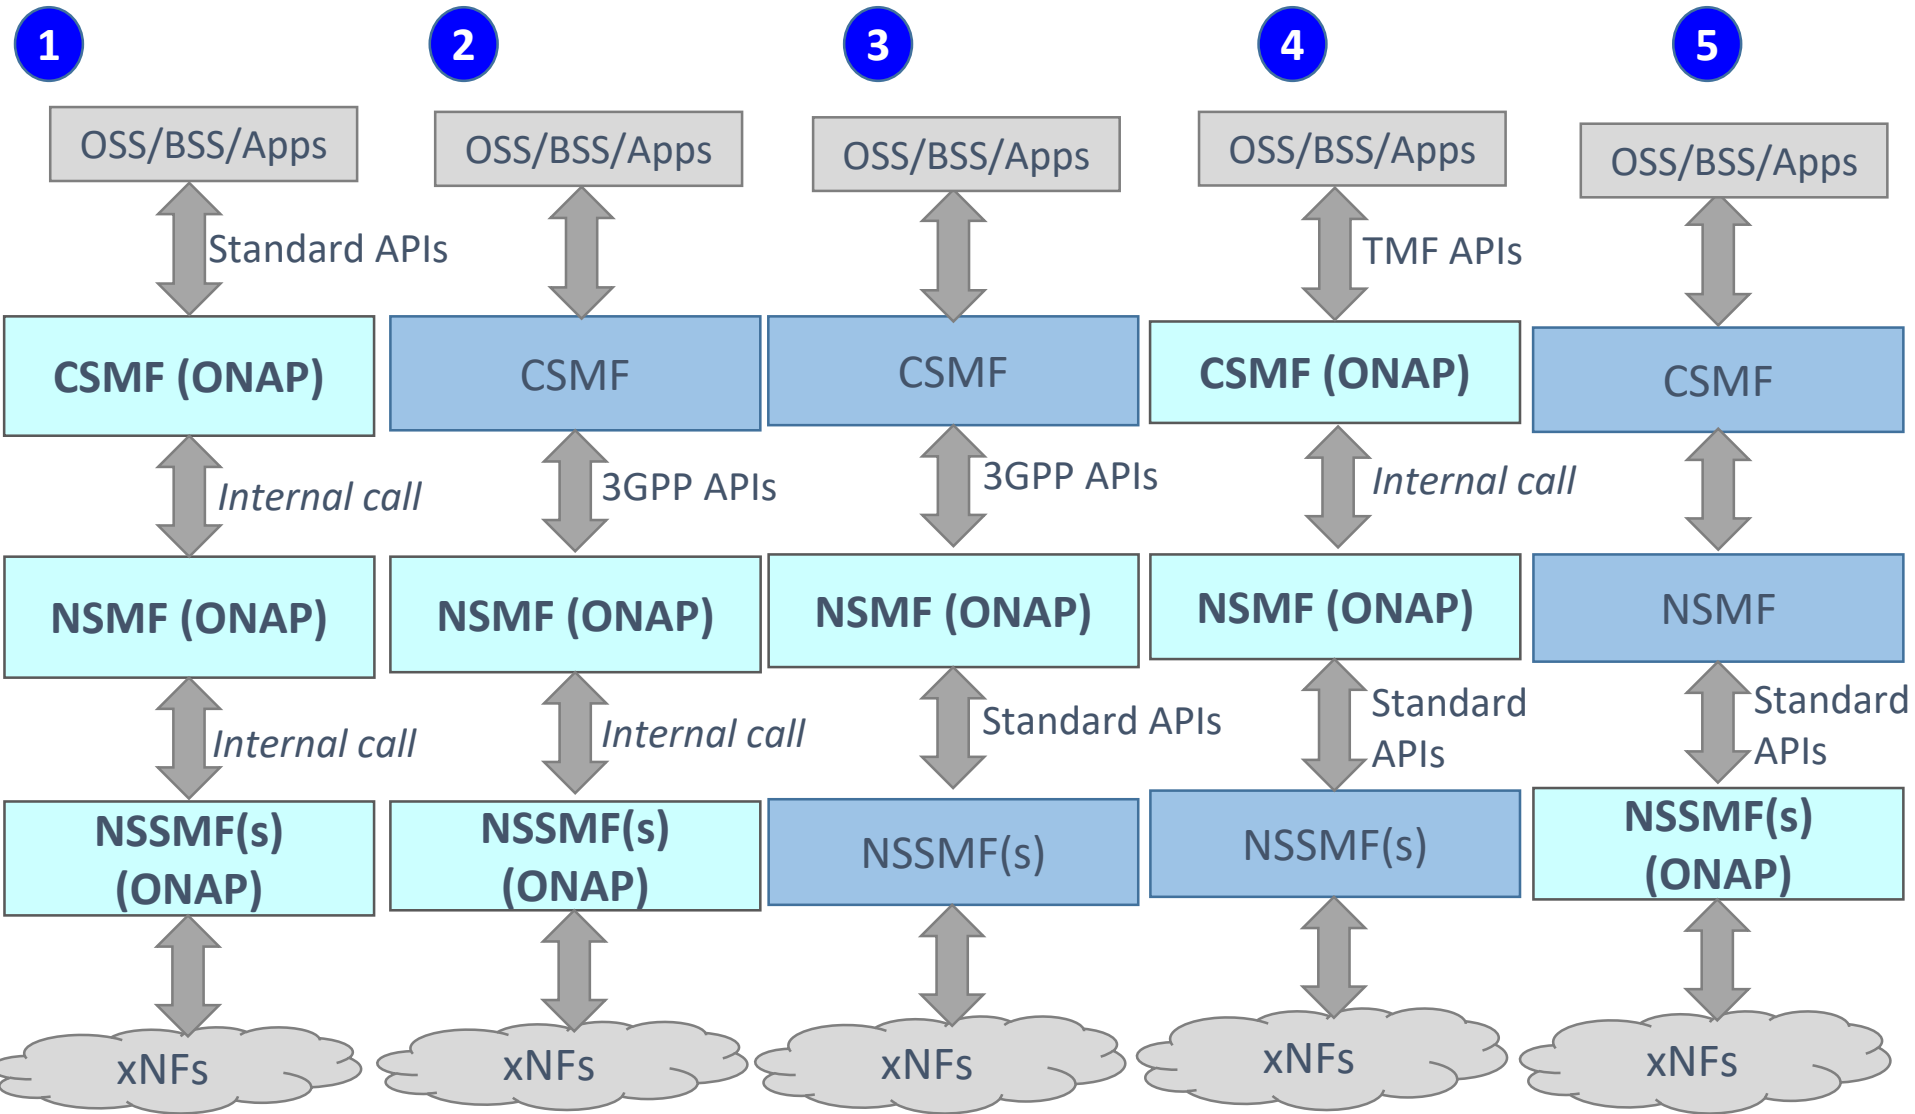


3<sup>rd</sup> party component

# End to End Network Slicing Use Case

NetworkSlice	Network Slice NRM	operationalState
NetworkSlice	Network Slice NRM	administrativeState
NetworkSlice	Network Slice NRM	serviceProfileList
NetworkSlice	Network Slice NRM	networkSliceSubnetRef
NetworkSliceSubnet	Network Slice NRM	operationalState
NetworkSliceSubnet	Network Slice NRM	administrativeState
NetworkSliceSubnet	Network Slice NRM	nsInfo
NetworkSliceSubnet	Network Slice NRM	sliceProfileList
NetworkSliceSubnet	Network Slice NRM	managedFunctionRef
NetworkSliceSubnet	Network Slice NRM	networkSliceSubnetRef
ServiceProfile	Network Slice NRM	serviceProfileId
ServiceProfile	Network Slice NRM	sNSSAList
ServiceProfile	Network Slice NRM	pLMNIdList
ServiceProfile	Network Slice NRM	perfReq
ServiceProfile	Network Slice NRM	maxNumberOfUEs
ServiceProfile	Network Slice NRM	coverageAreaTAList
ServiceProfile	Network Slice NRM	latency
ServiceProfile	Network Slice NRM	uEMobilityLevel
ServiceProfile	Network Slice NRM	resourceSharingLevel
ServiceProfile	Network Slice NRM	sST
ServiceProfile	Network Slice NRM	availability
SliceProfile	Network Slice NRM	sliceProfileId
SliceProfile	Network Slice NRM	sNSSAList
SliceProfile	Network Slice NRM	pLMNIdList
SliceProfile	Network Slice NRM	perfReq
SliceProfile	Network Slice NRM	maxNumberOfUEs
SliceProfile	Network Slice NRM	coverageAreaTAList
SliceProfile	Network Slice NRM	latency
SliceProfile	Network Slice NRM	uEMobilityLevel
SliceProfile	Network Slice NRM	resourceSharingLevel

# A1 Policy Extension ORAN-ONAP Harmonize

**Executive Summary** - This requirement enhances the A1 adapter/interface capabilities provided in Rel 6 as part of 5G/ORAN & 3GPP Standards Harmonization requirement ( REQ-38). O-RAN has defined A1 interface specification in the context of the management of 5G RAN elements to provide intent based policies for optimization of the RAN network performance. Planned enhancements for Rel 7 include additional support for managing A1 Policies, multiple A1 targets in the RAN, multi-version support for different A1 targets, and secure TLS communication.

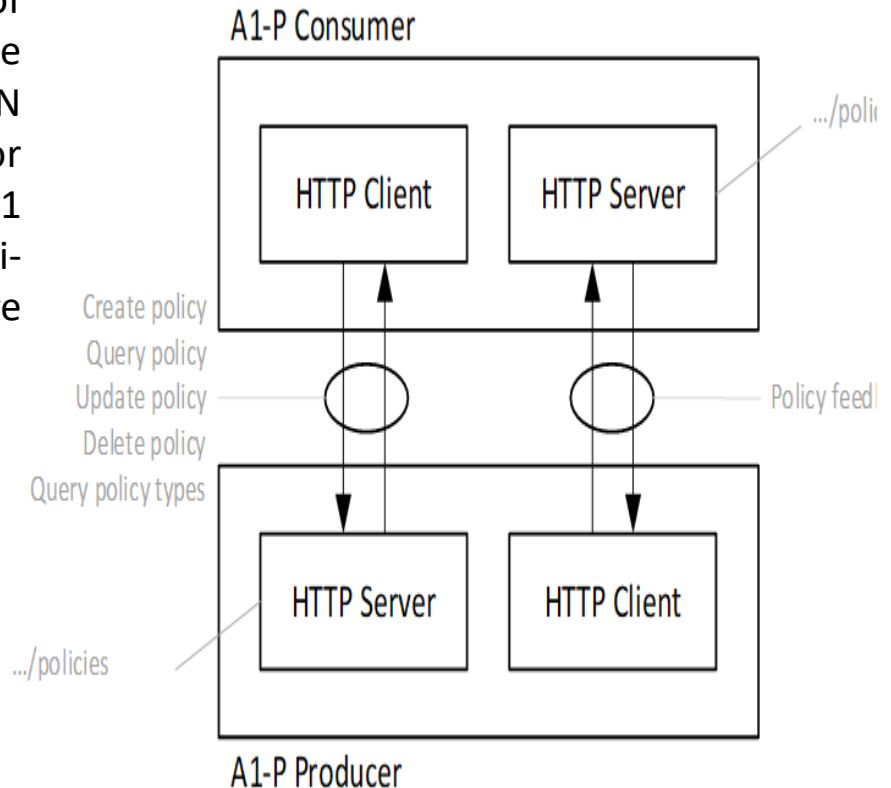

# State Management PoC (Bell Canada)

Bell Canada Leading a PoC related to State management using the C&PS project.  
Communication via Kafka topic (DMaaP).



# APPENDIX

Benjamin Cheung

# Access, Syncing, Indexing Runtime Config DB

## ACCESS TO C&PS Database (READ/WRITE):

**READ ONLY** - Run-Time parameters can be READ by any ONAP platform component and any ONAP plug-in. Examples of ONAP platform components are A&AI, SDC, SDNC etc.

**READ/WRITE** - Parameters can be READ/WRITE from Controllers, DCAE (future), VES Collector/DMAAP, A&AI, Policy/CLAMP (future) and other components with permission settings.

**DEFAULT** - SO (future), DCAE, A&AI (indirectly), Controllers (CDS, APPC, SDNC) will have default read/write access to C&PS Database

**DEFINABLE** - Other components will have default read-only access to Config & Persist Service but can be given Read/Write access on a per record basis.

## SYNCING NEW xNF ADDED or DELETED (A&AI):

**ELEMENT SYNC** - Software keeps the A&AI elements with the elements in the RunTime Config DB in Sync. When the network first being established, a *GetAllPNFs* function from A&AI can be used on startup.

**A&AI** - A&AI is still the master of valid entities in the network and provides a dynamic view of the assets (xNFs) available to ONAP

**C&PS Database** - The C&PS Database is a master of the associate (exo-inventory) data associated with the entities.

**DYNAMIC VIEW** - When a xNF appears or is removed from the system, C&PS Database records will be added/removed based on A&AI entries.

**LOGIC** - When a xNF appears is removed there is logic to determine how and when something is to be updated. There is some intelligence to know what elements of update.

## INDEXING:


**INDEXING** - Data Records will be indexed by xNF (VNF, PNF, ANF). It would be an objective to have a similar indexing mechanism as A&AI. May also need an index to be a logical object ID.

**RETRIEVAL** - How are data records retrieved efficiently. This relates how the records are indexed.

# Dependencies vs Scope


## DEPENDENCIES – need to operate

SDC Yang Model (to load schema)  
ability to process & translate yang models into schemas  
AAF (intra-ONAP security)  
Database implementation for Data Persistency  
(for example MariaDB)



## DEPENDENCIES – value added

DMaaP (some use cases to work / indirect dependency)




## SCOPE



**C&PS  
Database**

RECEIVE INFORMATION  
WRITE INFORMATION  
PUBLISH CHANGES  
REFERENTIAL INTEGRITY  
INGEST PACKAGES  
LOGICAL OBJECTS  
ASSOCIATIONS  
CARDINALITY RULES  
LINKING RESTRICTIONS  
SYNCHRONIZATION  
DATA INTEGRITY & RECOVERY



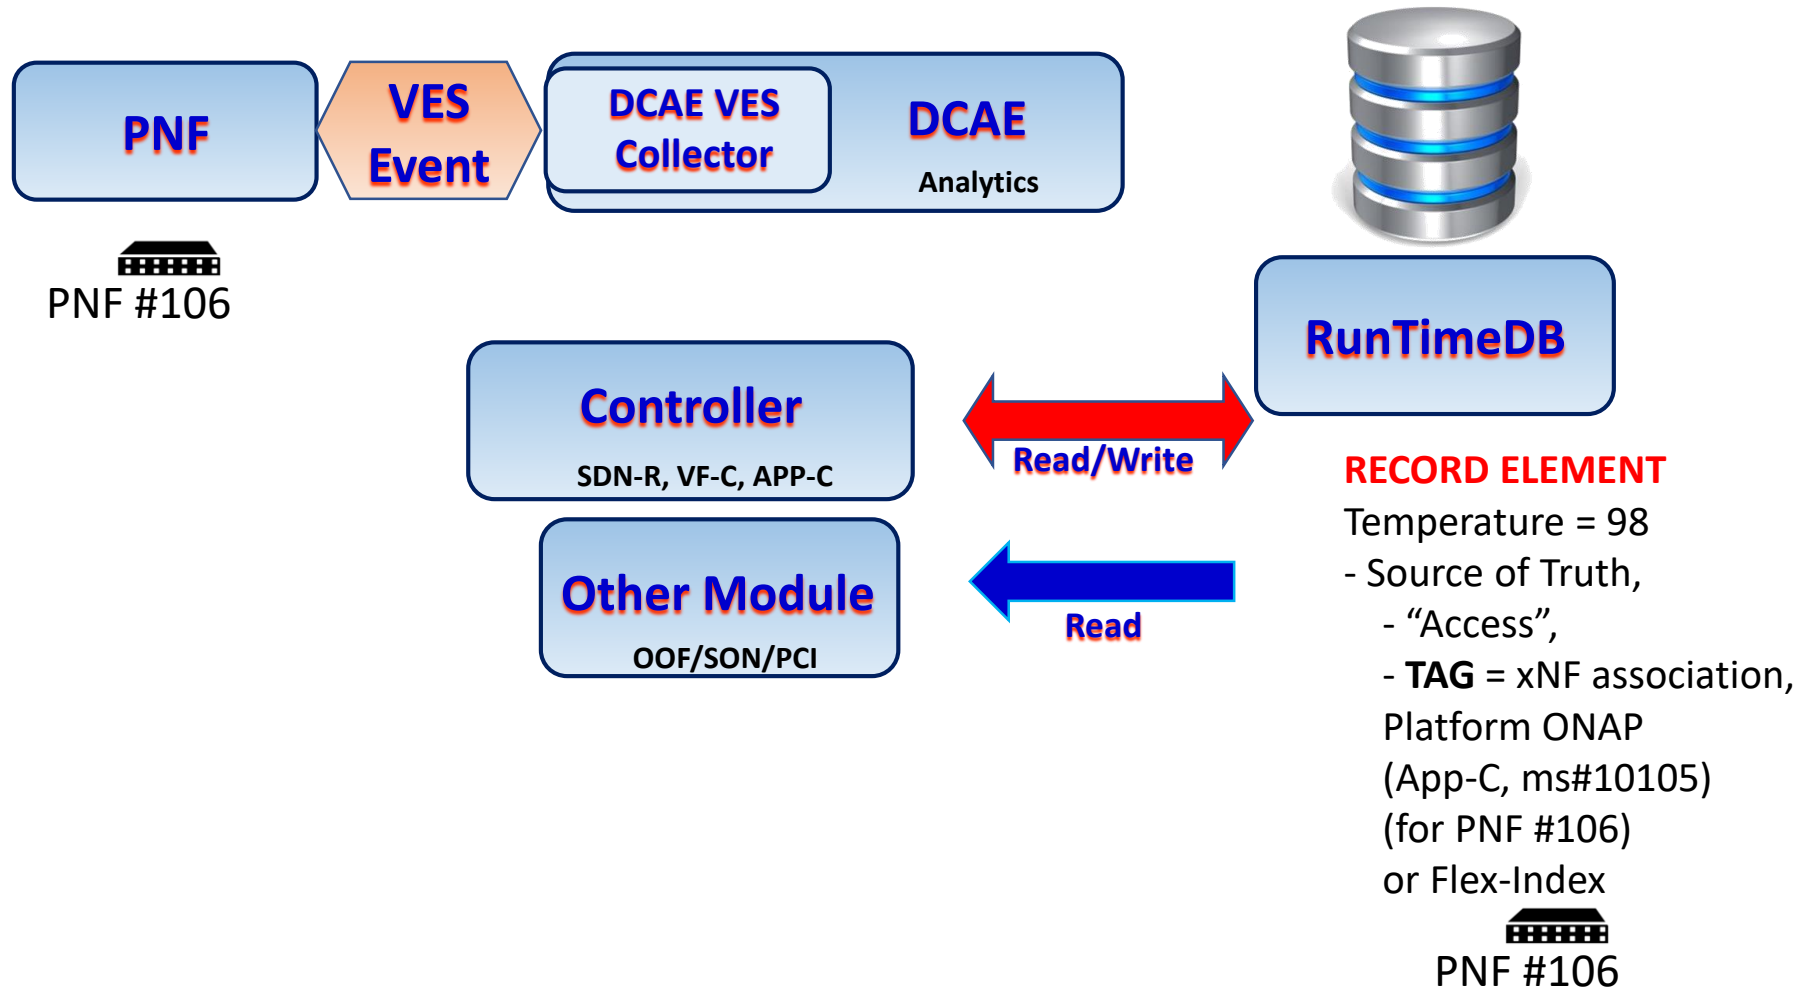





# Config & Persist Service (Run-Time View)










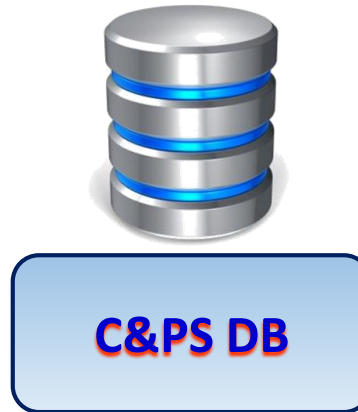


-  PNF #101
-  PNF #102
-  PNF #103
-  PNF #104



-  PNF #101 
-  PNF #102 
-  PNF #103 
-  PNF #104 




-  PNF #101 
-  PNF #102 
-  PNF #103 
-  PNF #104 

A&I correlated/Index to RunTimeDB  
Publish changes in A&I, notification on DMaaP

Indices into Config & Persist Service may also use Flex-Index (such as CellID)

# C&PS Database (Run-Time View)

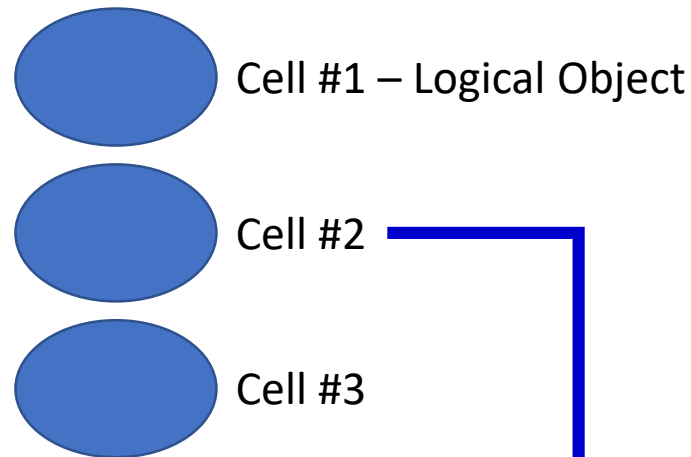

## RECORD ELEMENT

INDEX = PNF #106

Parameter #1  
Parameter #2  
Parameter #3  
State Info X.733

### Associations

{ Logical Object #111 Cell #2 }

### Cardinality Rules

### Linking Restrictions

## RECORD ELEMENT

INDEX = Logical Object #111

Parameter #1  
Parameter #2  
Parameter #3  
State Info

### Associations

{ PNF #106 }

### Cardinality Rules

### Linking Restrictions

## RECORD ELEMENT INDEX = PNF #106

Parameter #1  
Parameter #2  
Parameter #3  
Logical object, Cell #1  
Cell Parameter #1  
Cell Parameter #2  
Cell Parameter #3